



Interfacing OLED Display to MCU STC12LE5A60S2


The Parallel (8080 Series MCU)Reference Example

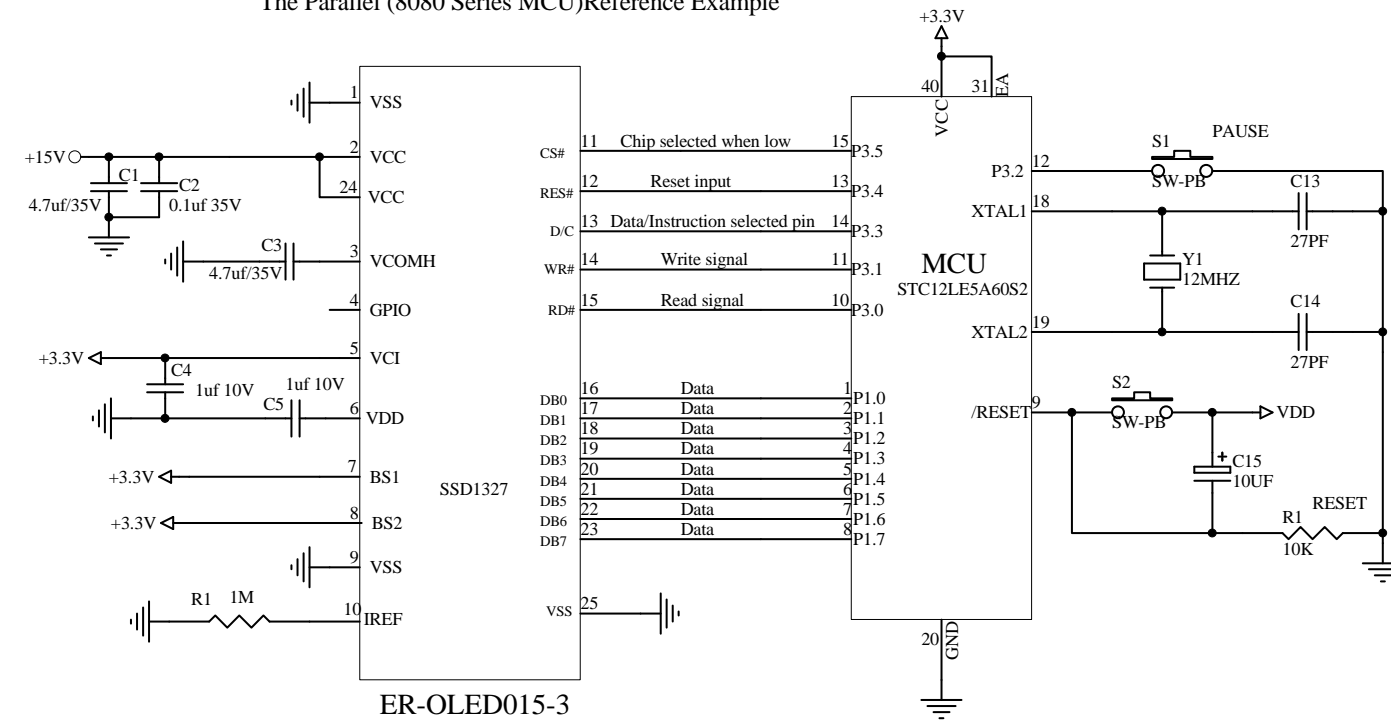

The Parallel (6800 Series MCU)Series MCU)Reference Example

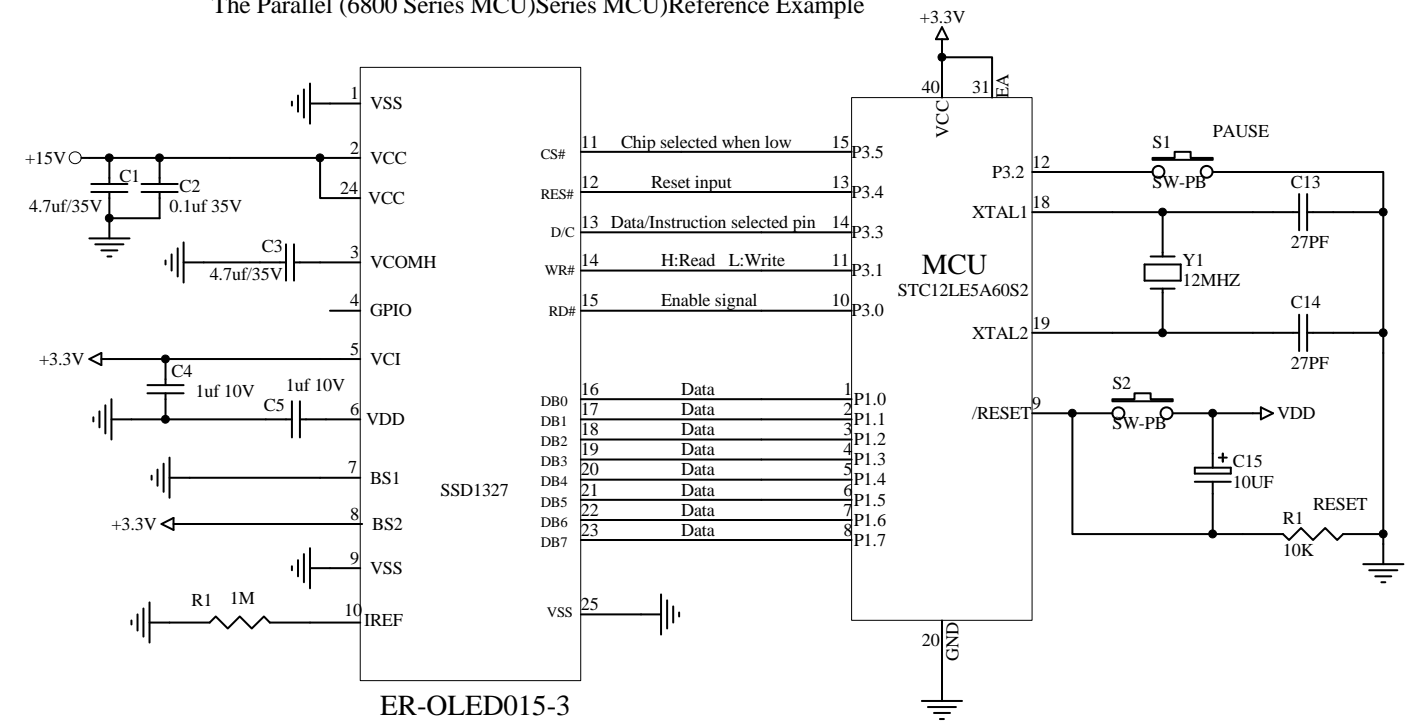


The Serial (4-Line SPI) Reference Example

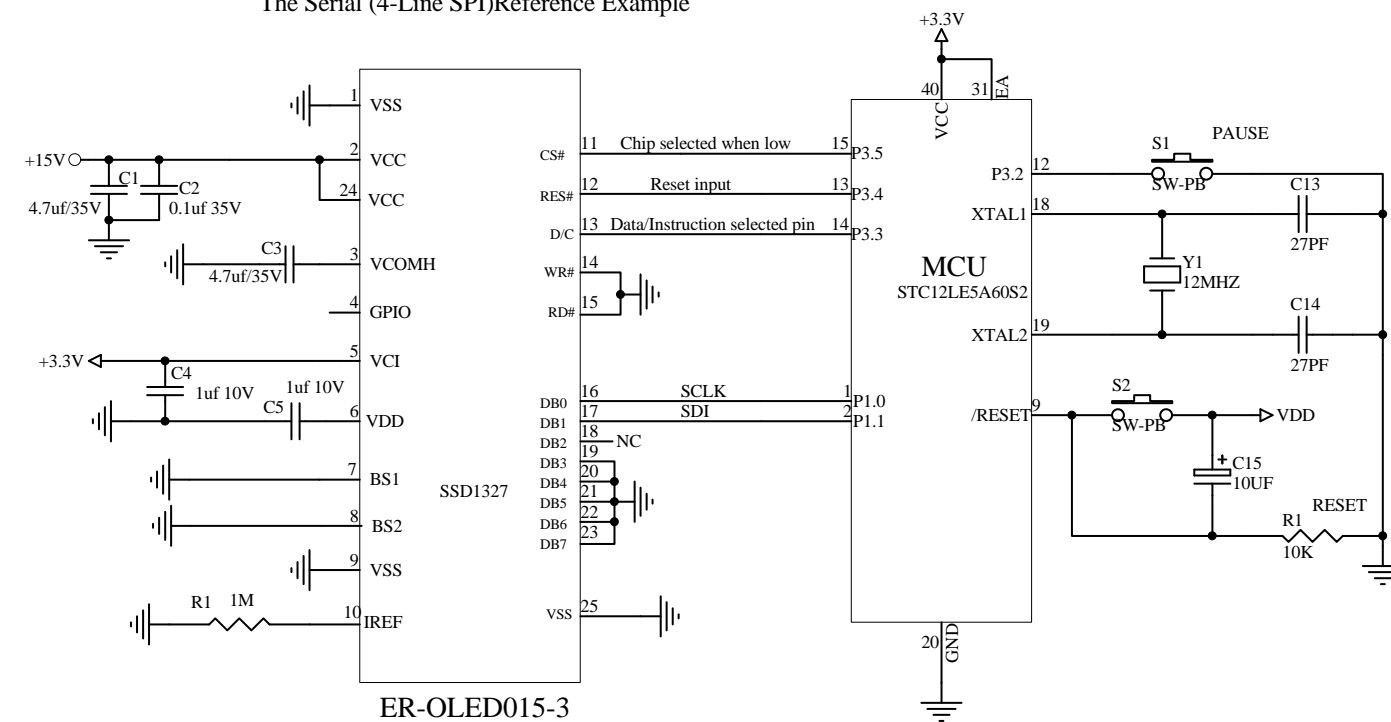

The Serial (2-Line I2C)Reference Example

PIN 11(DC) acts as SA0 for slave address selection.
 If SA0 conncted to H: Slave address :0x7a
 If SA0 conncted to L: Slave address :0x78

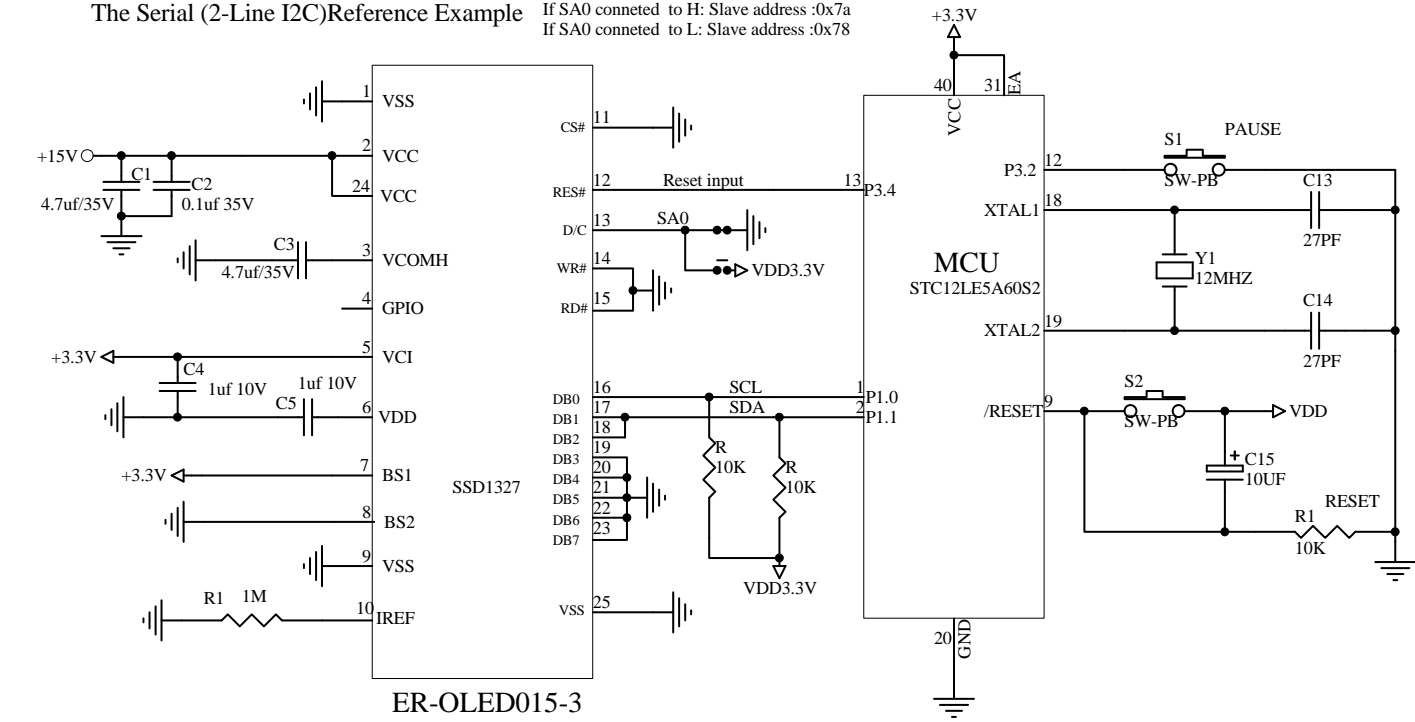

				Title EASTRISING TECHNOLOGY CO.,LTD.		
REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE	Size A	Number ER-OLED015-3	Revision A0
A0	1`ST DESIGN	JIM	07-Sep-2019			
A1				Date: 07-Sep-2019	Sheet of 1	
A2				File	Drawn By Javen	