



Interfacing OLED Modules ER-OLED1.71-1 to the STC12LE5A60S2

The Serial (4line SPI)Reference Example


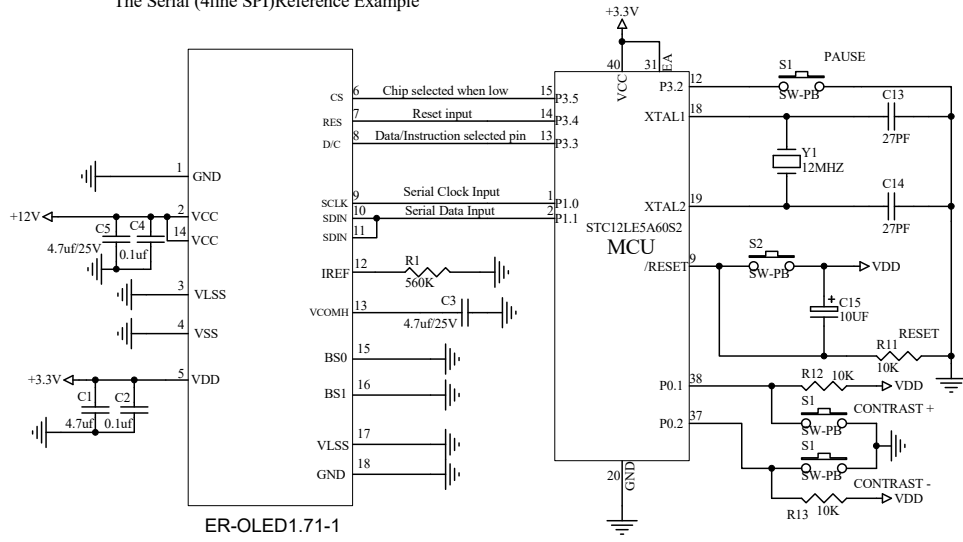


The Serial (3line SPI)Reference Example

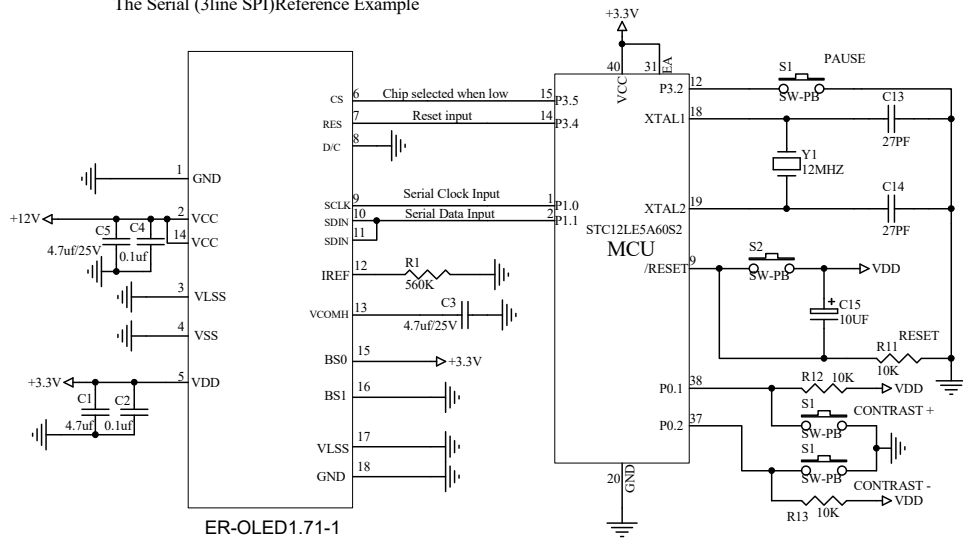

The Serial (2line I2C)Reference Example

PIN 8(DC) acts as SA0 for slave address selection.
If SA0 connected to H: Slave address :0x7a
If SA0 connected to L: Slave address :0x78

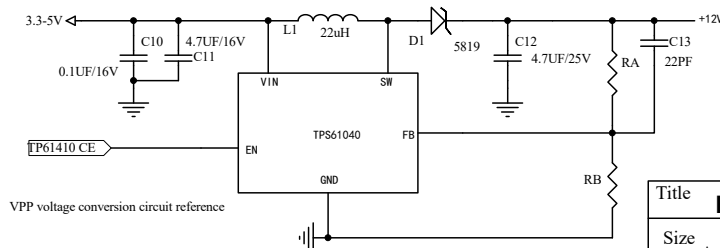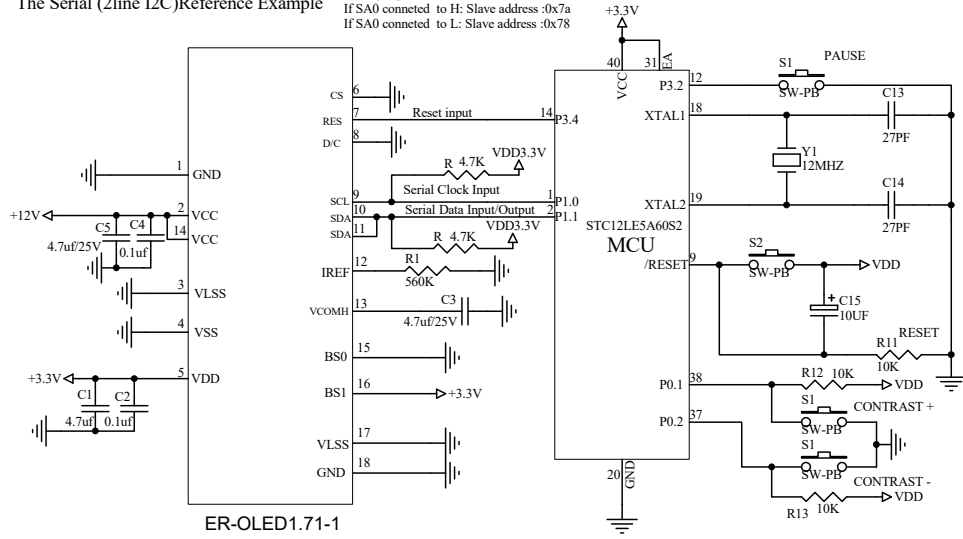

Title		
EASTRISING TECHNOLOGY CO.,LTD.		
Size	Number	Revision
A	ER-OLED1.71-1 Series	A0
Date:	Sheet of	1
Mar-25-2025	Drawn By	Javen