


Interfacing OLED Display Module to MCU STC89LE52RC


The Serial (4line SPI)Reference Example

NOTE: 4 Line SPI interface
The factory default is 4 line SPI interface
R3,R4 welding 4.7K and R1,R2,R8 No welding

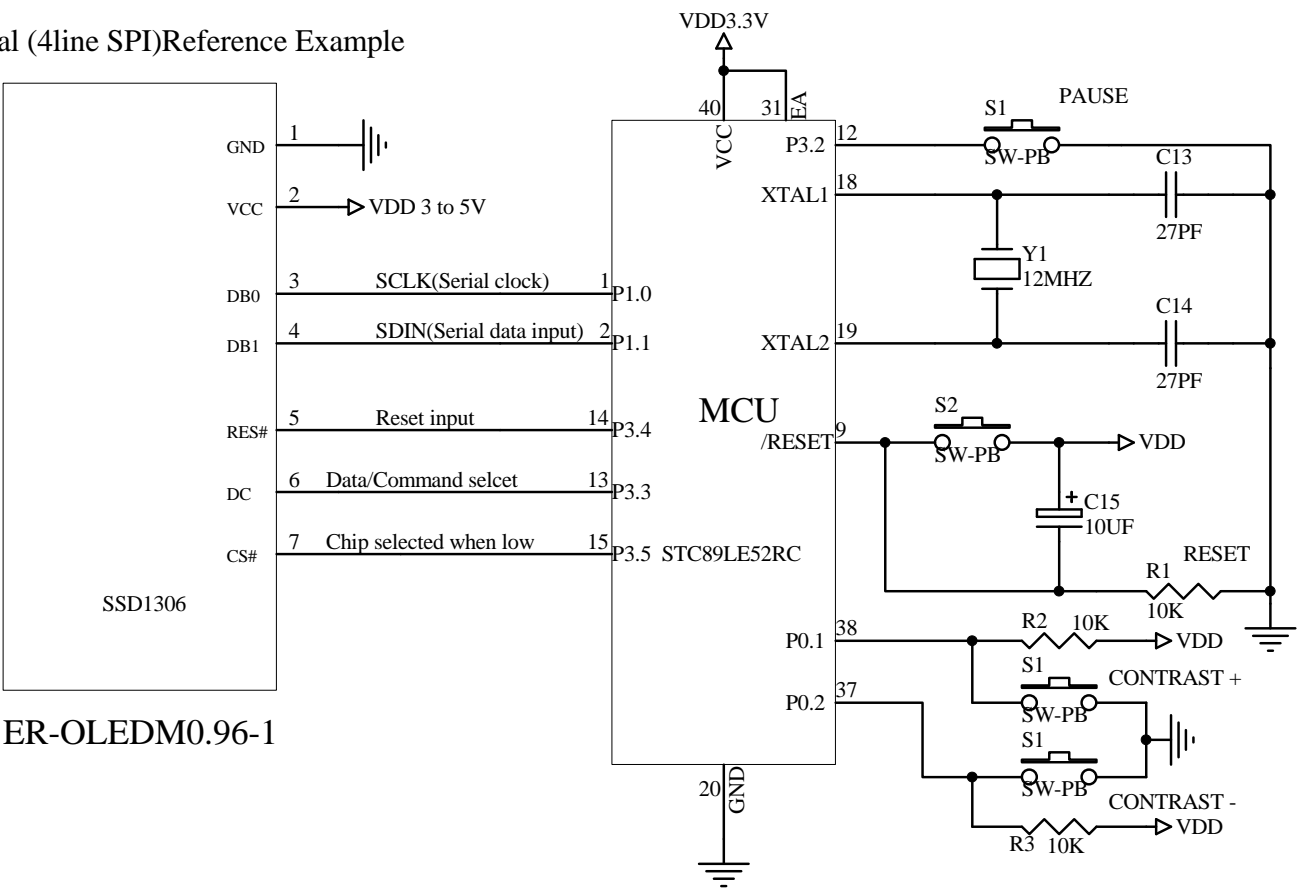


The Serial (3line SPI)Reference Example

NOTE: 3 Line SPI interface
R2,R3 welding 4.7K and R1,R4,R8 No welding

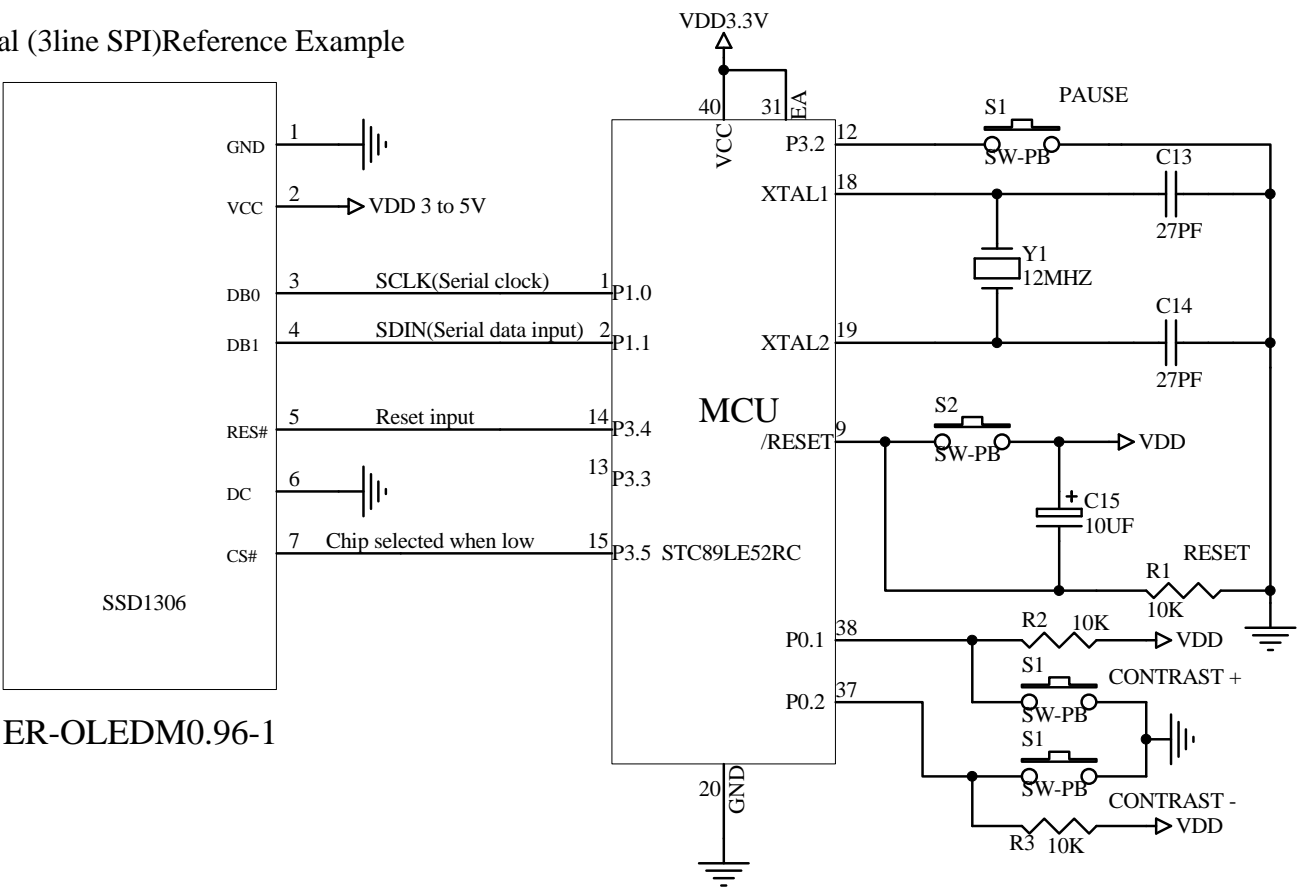

The Serial (I2C) Reference Example

NOTE: 2 Line I2C interface
R1,R4,R6,R7 welding 4.7K,R8 welding 0R and R2,R3 No welding

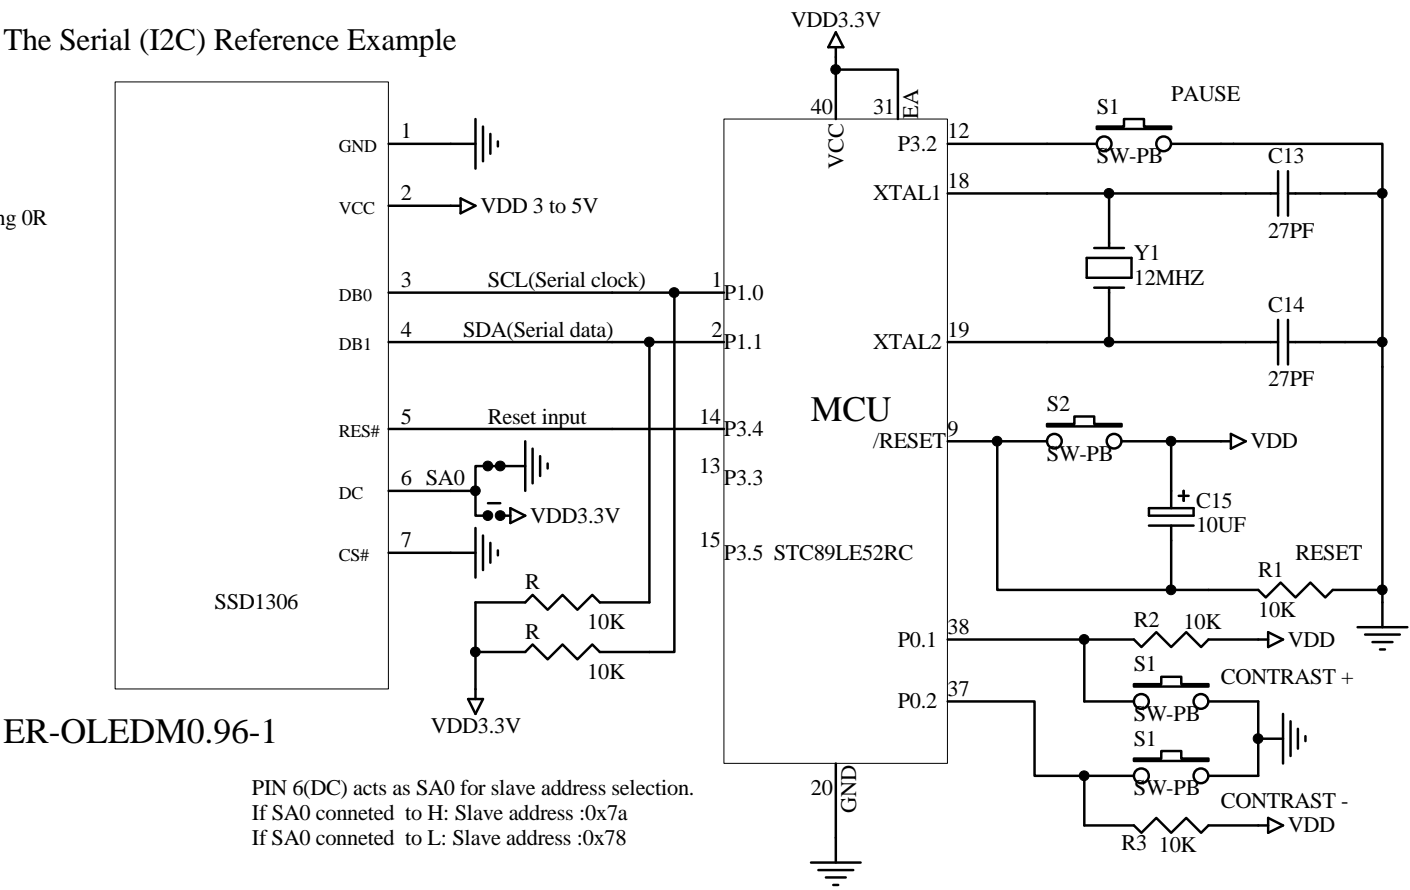

REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST DESIGN	JIM	Aub-26-2019
A1			

Title EASTRISING TECHNOLOGY CO.,LTD.			
Size A	Number ER-OLEDM0.96-1	Revision A0	
Date:	Aub-26-2019	Sheet of	1
File		Drawn By	Javen