


# Interfacing OLED Modules to the STC12C5A60S2 MCU

## The Serial (4line SPI)Reference Example

NOTE: 4 Line SPI interface  
The factory default is 4 line SPI interface


ER-OLEDM010-1-SPI-I2C

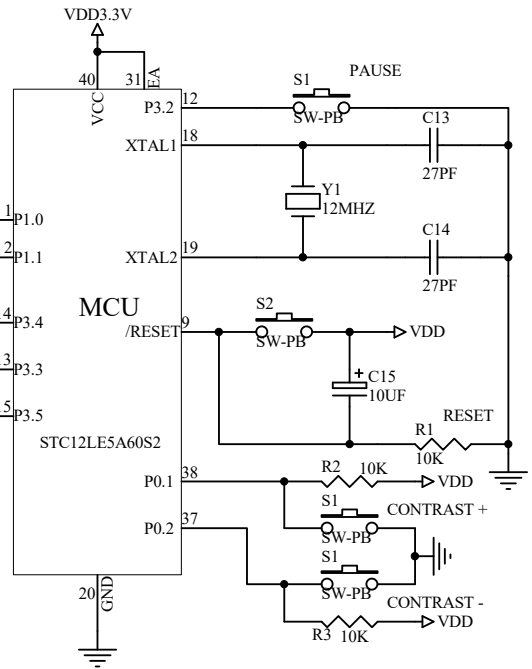

## The Serial (I2C) Reference Example

ER-OLEDM010-1-SPI-I2C

PIN 6(DC) acts as SA0 for slave address selection.  
If SA0 conncted to H: Slave address :0x7a  
If SA0 conncted to L: Slave address :0x78

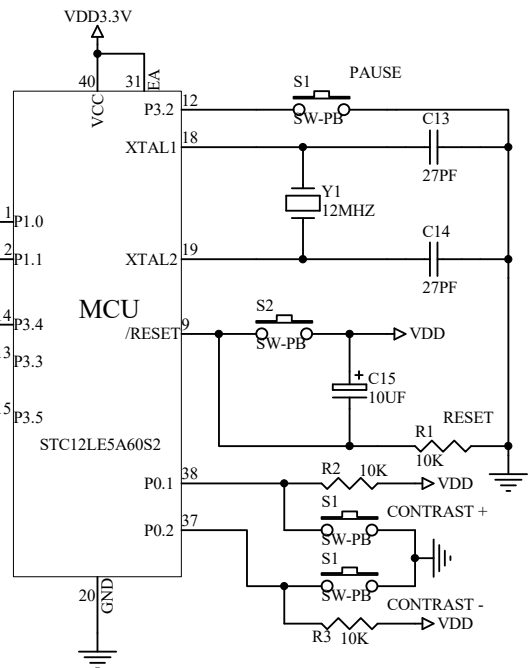

Title EASTRISING TECHNOLOGY CO.,LTD.

REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST DESIGN	JIM	Mar-17-2025
A1			

Size	Number	Revision
A	ER-OLEDM010-1-SPI-I2C	A0
Date:	Mar-17-2025	Sheet of 1
File		Drawn By Javen