



# Interfacing OLED Modules ER-OLEDM024-3 to the STC12LE5A60S2


The Parallel (8080 Series MCU)Reference Example

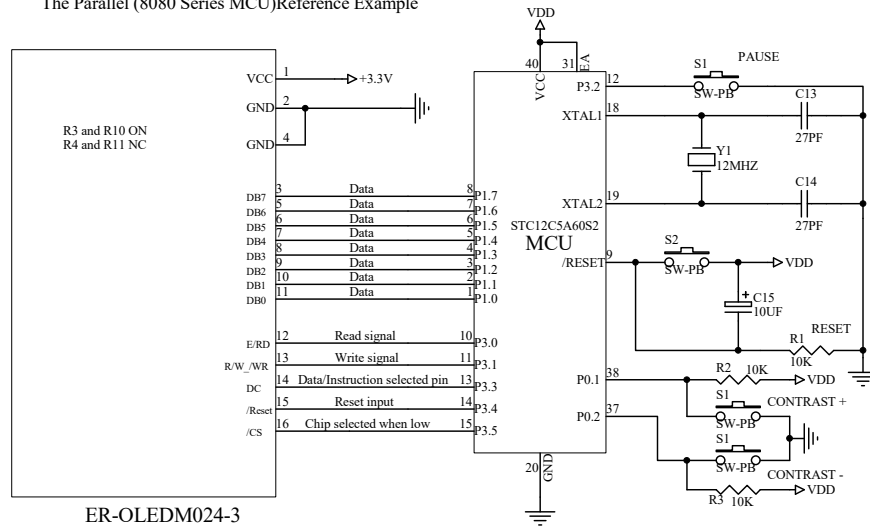


The Parallel (6800 Series MCU)Reference Example

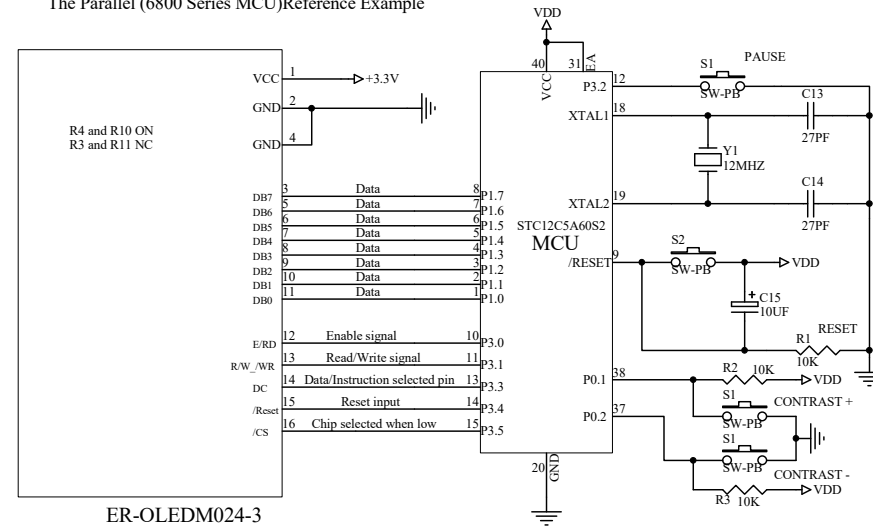

The Serial 4 Line SPI Reference Example

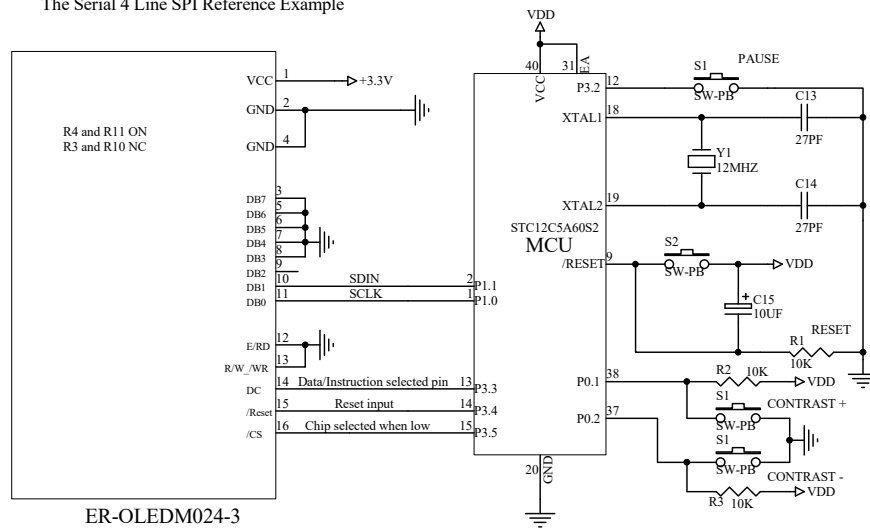

The Serial 2 Line I2C Reference Example

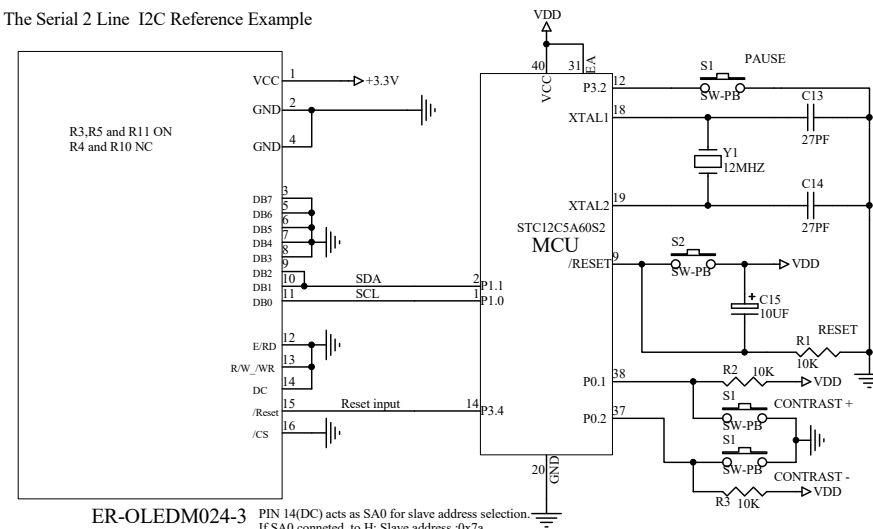

PIN 14(DC) acts as SA0 for slave address selection.  
If SA0 connected to H: Slave address :0x7a  
If SA0 connected to L: Slave address :0x78

Title **EASTRISING TECHNOLOGY CO.,LTD.**

REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE	Size	Number	Revision
A0	1'ST DESIGN	JIM	01-Apr-2025	A	ER-OLEDM024-3 Series	A0
A1						
				Date:	01-Apr-2025	Sheet of 1
				File		Drawn By Javen