



Interfacing OLED Module ER-OLEDM027-3 to the STC12LE5A60S2

The Serial (4line SPI)Reference Example

NOTE: 4 Line SPI interface
The factory default is 4 line SPI interface

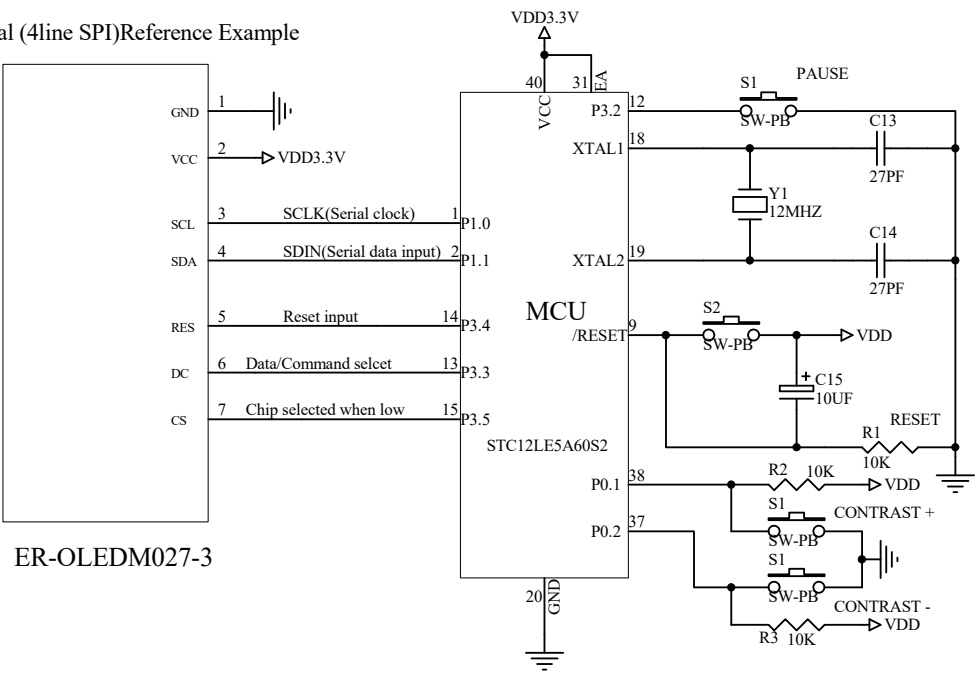

The Serial (I2C) Reference Example

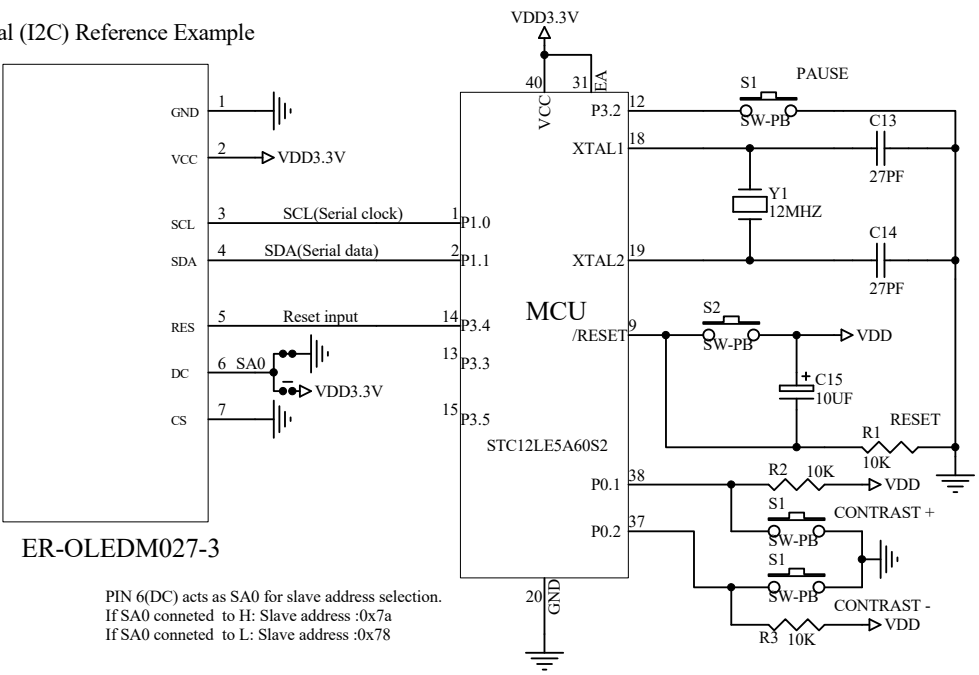

PIN 6(DC) acts as SA0 for slave address selection.
If SA0 conncted to H: Slave address :0x7a
If SA0 conncted to L: Slave address :0x78

Title EASTRISING TECHNOLOGY CO.,LTD.

| REV. | DESCRIPTION OF MODIFY | MODIFY BY | DATE |
|------|-----------------------|-----------|-------------|
| A0 | 1'ST DESIGN | JIM | Mar-26-2025 |
| A1 | | | |

| Size | Number | Revision |
|-------|---------------|----------------|
| A | ER-OLEDM027-3 | A0 |
| Date: | Mar-26-2025 | Sheet of 1 |
| File | | Drawn By Javen |