Interfacing OLED Modules ER-OLEDM1.29-1 to the STC12LE5A60S2

The Serial (4line SPI)Reference Example

NOTE: 4 Line SPI interface

The factory default is 4 line SPI interface

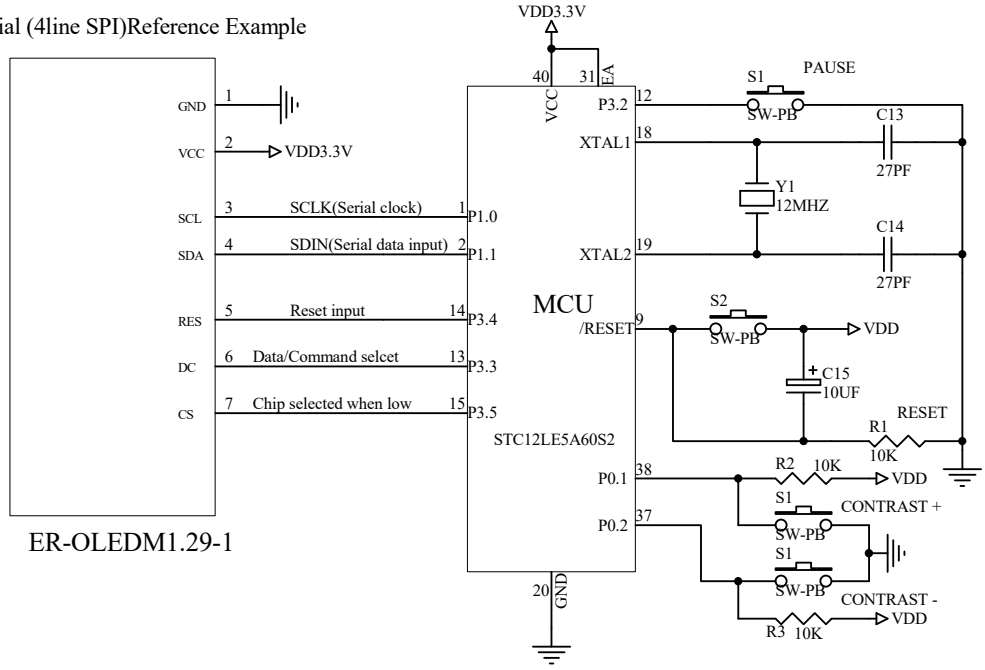

ER-OLEDM1.29-1

The Serial (I2C) Reference Example

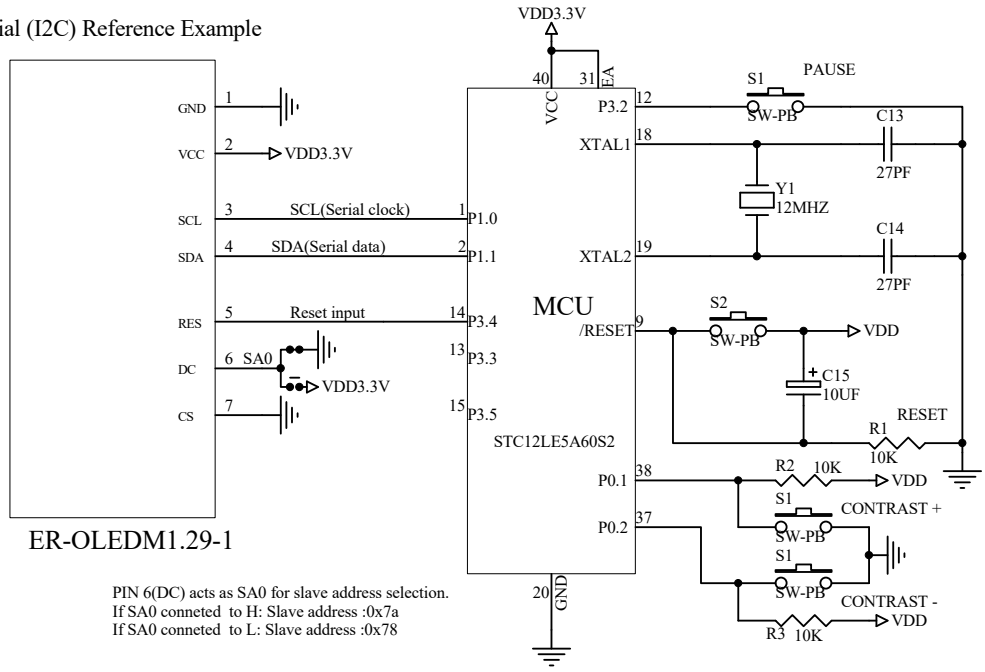

ER-OLEDM1.29-1

PIN 6(DC) acts as SA0 for slave address selection.
If SA0 conneted to H: Slave address :0x7a
If SA0 conneted to L: Slave address :0x78

REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST DESIGN	JIM	Mar-25-2025
A1			

Title	**EASTRISING TECHNOLOGY CO.,LTD.**	
Size A	Number ER-OLEDM1.29-1	Revision A0
Date: Mar-25-2025		Sheet of 1
File		Drawn By Javen