



Interfacing OLED Module ER-OLEDM1.69-2 to the STC12LE5A60S2

The Serial (4line SPI)Reference Example

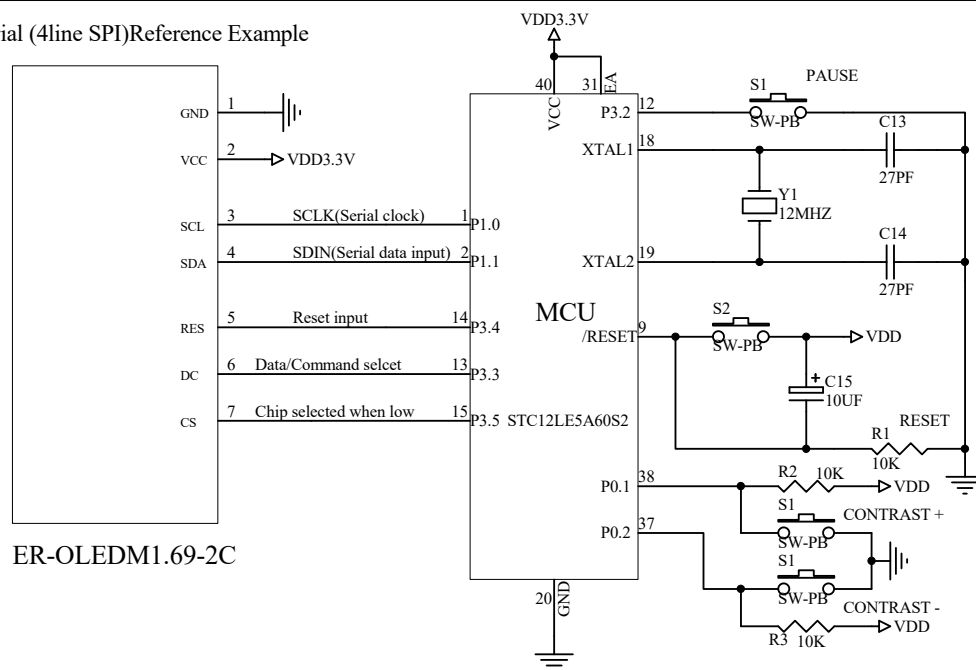

ER-OLEDM1.69-2C

The Serial (I2C) Reference Example

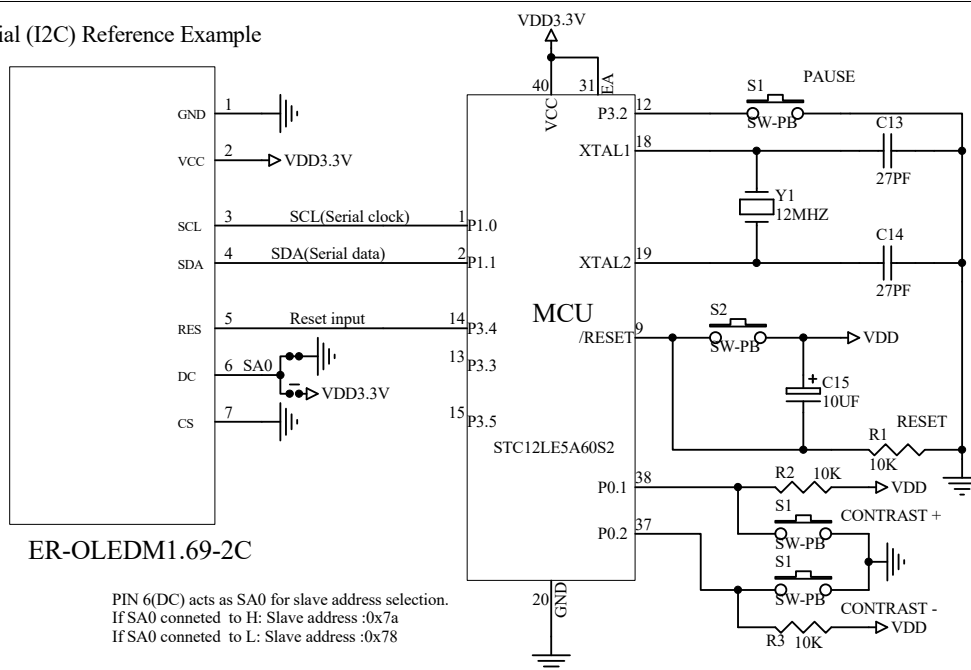

ER-OLEDM1.69-2C

PIN 6(DC) acts as SA0 for slave address selection.
If SA0 connected to H: Slave address :0x7a
If SA0 connected to L: Slave address :0x78

Title **EASTRISING TECHNOLOGY CO.,LTD.**

REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST DESIGN	JIM	Jul-18-2025
A1			

Size	Number	Revision
A	ER-OLEDM1.69-2C	A0
Date:	Jul-18-2025	Sheet of 1
File		Drawn By Javen