



Interfacing OLED Modules ER-OLEDM2.45-1 to the STC12LE5A60S2

The Serial (4line SPI)Reference Example

NOTE: 4 Line SPI interface
The factory default is 4 line SPI interface

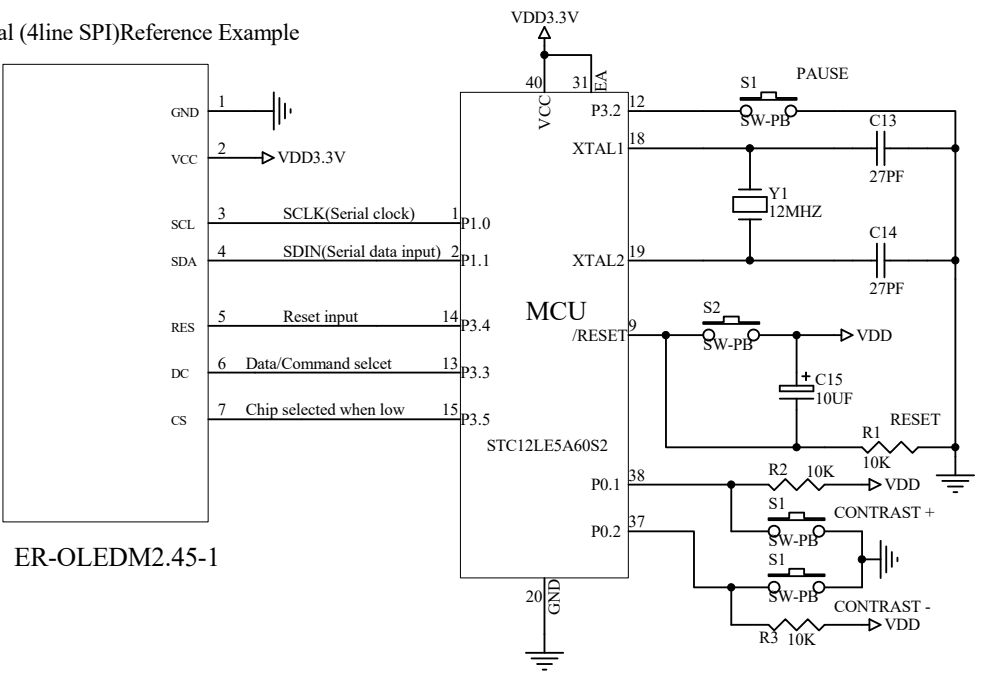

The Serial (I2C) Reference Example

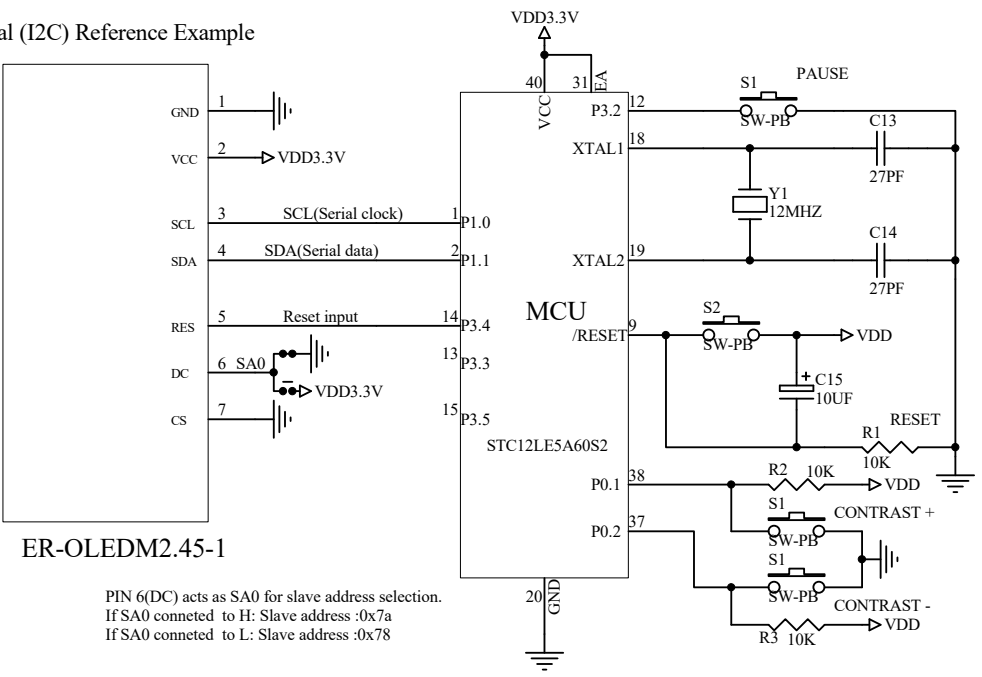

PIN 6(DC) acts as SA0 for slave address selection.
If SA0 conncted to H: Slave address :0x7a
If SA0 conncted to L: Slave address :0x78

Title				EASTRISING TECHNOLOGY CO.,LTD.		
REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE	Size	Number	Revision
A0	1'ST DESIGN	JIM	Apr-01-2025	A	ER-OLEDM2.45-1	A0
A1				Date:	Apr-01-2025	Sheet of 1
				File		Drawn By Javen