


SECTION A-A

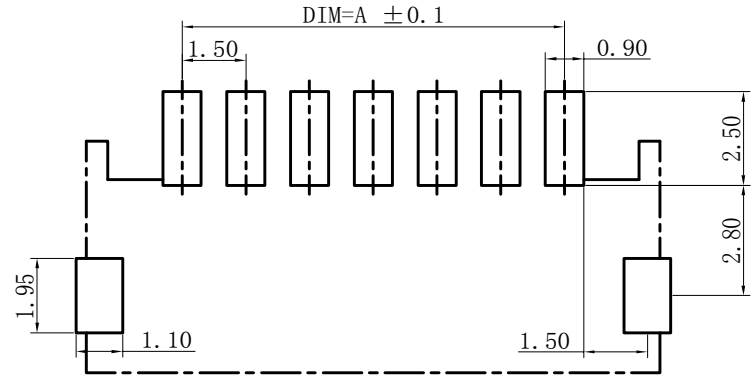

P. C. B LAYOUT REF

Specifications:  
 Housing: LCP UL94-V0 Color: Nature  
 Contact: Phosphor Bronze  
 Operating Voltage: 100V AC/DC  
 Current Rating: 1A AC/DC  
 Withstand Voltage: 250V AC/Minute  
 Contact Resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 100m\Omega$   
 Operating Temperature:  $-25^{\circ}C \sim +85^{\circ}C$

NO. of Contacts (n)	Dimensions		
	A	B	C
002	1.5	2.9	6.1
003	3.0	4.4	7.6
004	4.5	5.9	9.1
005	6.0	7.4	10.6
006	7.5	8.9	12.1
007	9.0	10.4	13.6
008	10.5	11.9	15.1
009	12.0	13.4	16.6
010	13.5	14.9	18.1
011	15.0	16.4	19.6
012	16.5	17.9	21.1
013	18.0	19.4	22.6
014	19.5	20.9	24.1
015	21.0	22.4	25.6
016	22.5	23.9	27.1
017	24.0	25.4	28.6
018	25.5	26.9	30.1
019	27.0	28.4	31.6
020	28.5	29.9	33.1



旭日东方科技有限公司  
 EastRising Technology Co., Ltd.  
www.lcd-china.com TEL: +86-755-33503873 FAX: +86-755-33507642-801



CD

UNIT: MM	SIZE: A4	SHEET: 1 OF 1
Part Number for Order: ER-CON1.5-2P-SMD		
DRAWN BY : Jim	CHECKED BY: Tony	APPROVED BY : Liu