
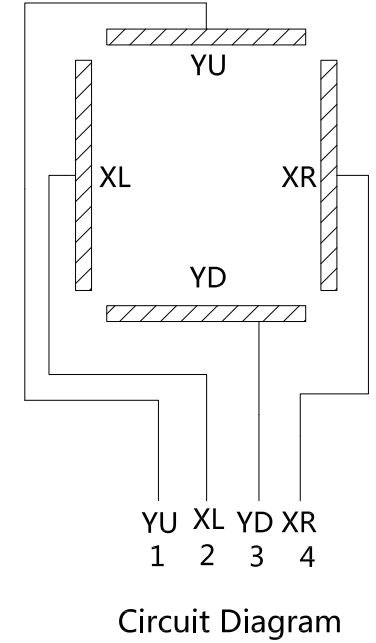
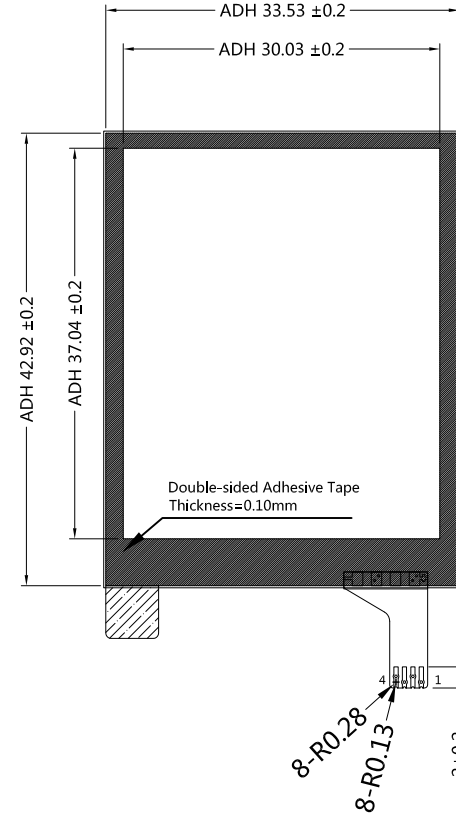


Customer Approved by:

REV	DESCRIPTION	DESIGN	DATE
1.0	1'ST DEGIN	JAVEN	Aug-06-2018

Unit: mm

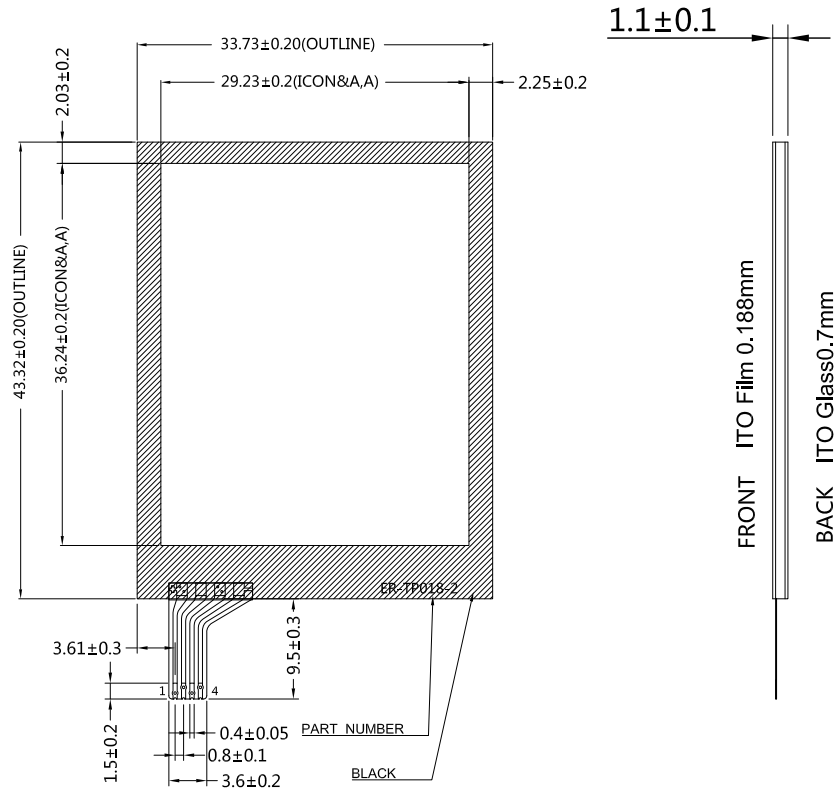

- Structure : Film+Glass+FPC
Film:Bright Screen (0.188mm)
Glass:(0.7mm)
- Operating Voltage : 3-5V
- Insulation Resistance : ≥20MΩ(25V DC)
- Linearity : ≤1.5%
- Transmittance : 80%±3
- Operation Force : 10-100g
- Life Time : ≥1,000,000次
- Operating Temp : -20°C~+60°C , ≤90%RH
- Storage Temp : -30°C~+70°C , ≤90%RH
- Tolerance:±0.20mm

NO.	SYMBOL
1	YU
2	XL
3	YD
4	XR



旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL.		UNITS
APP	CHK	DWN			JIM	Aug-6-18	DO NOT SCALE THIS DRAWING.
			ER-TP018-2			SCALE: N.T.S.	
						SHEET: 1	