
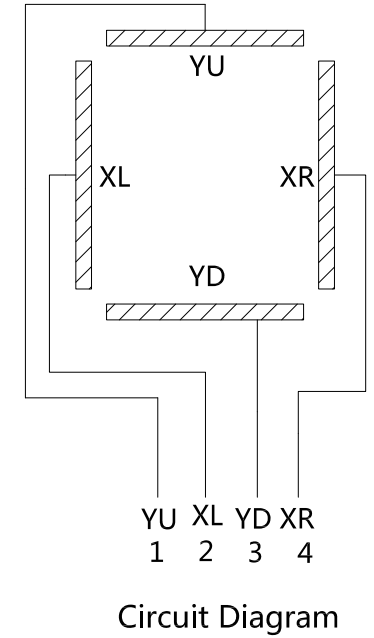
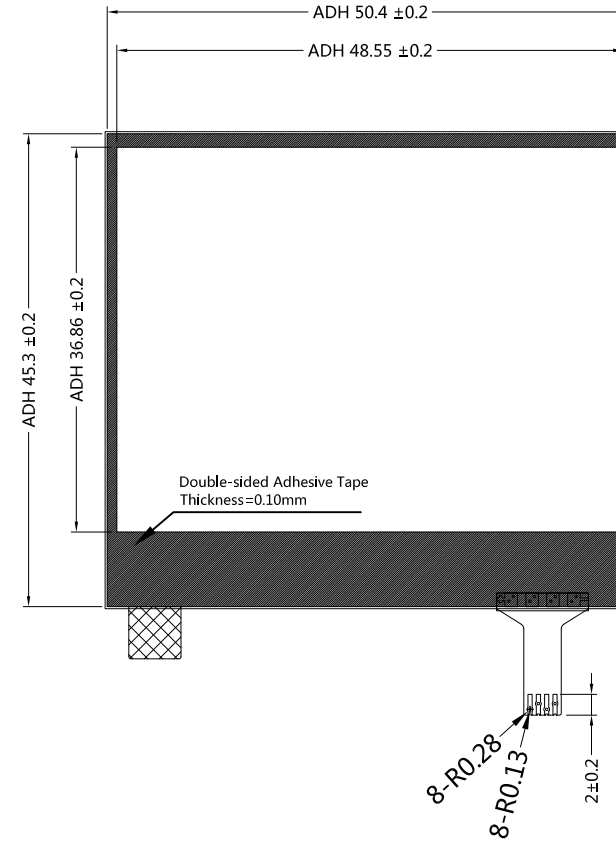


Customer Approved by:

REV	DESCRIPTION	DESIGN	DATE
1.0	1'ST DEGIN	JAVEN	Jul-06-2018

Unit: mm

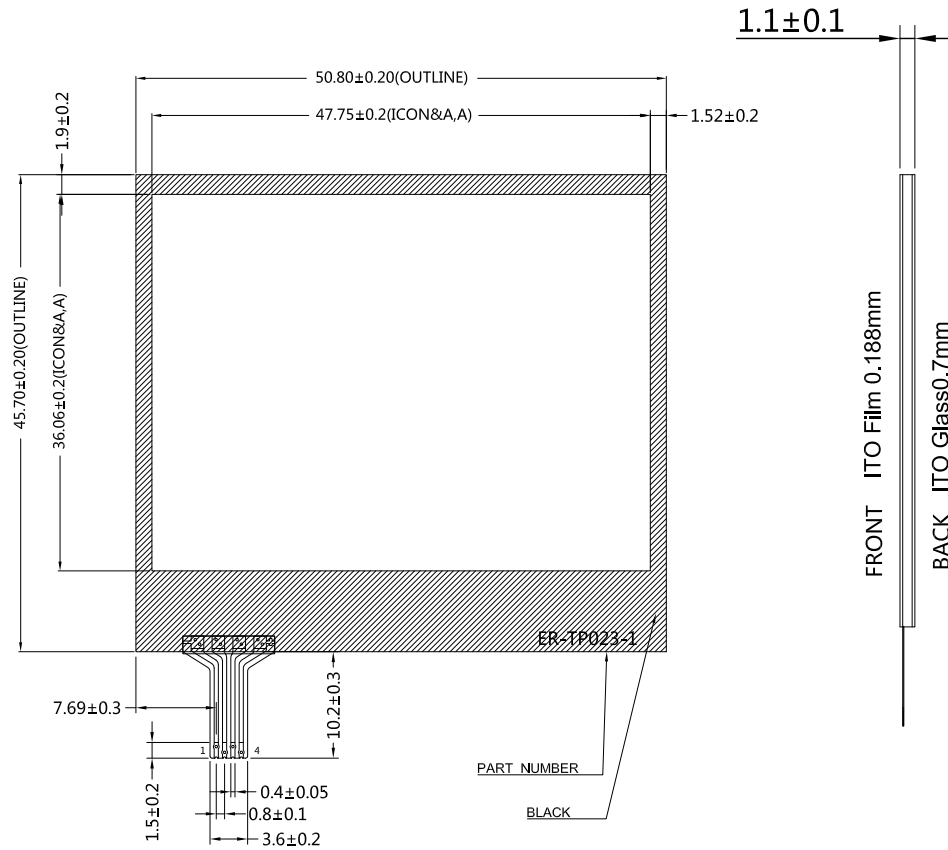

- Structure : Film+Glass+FPC  
Film: Bright Screen ( 0.188mm )  
Glass:(0.7mm)
- Operating Voltage : 3-5V
- Insulation Resistance :  $\geq 20M\Omega$ (25V DC)
- Linearity :  $\leq 1.5\%$
- Transmittance :  $80\% \pm 3$
- Operation Force : 10-100g
- Life Time :  $\geq 1,000,000$ 次
- Operating Temp :  $-20^{\circ}C \sim +60^{\circ}C$  ,  $\leq 90\%RH$
- Storage Temp :  $-30^{\circ}C \sim +70^{\circ}C$  ,  $\leq 90\%RH$
- Tolerance:  $\pm 0.20$ mm

NO.	SYMBOL
1	YU
2	XL
3	YD
4	XR



旭日东方科技有限公司  
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL.		UNITS
APP	CHK	DWN			JIM	Aug-6-18	SCALE:
			ER-TP023-1			N.T.S.	
DO NOT SCALE THIS DRAWING.					SHEET:		1