

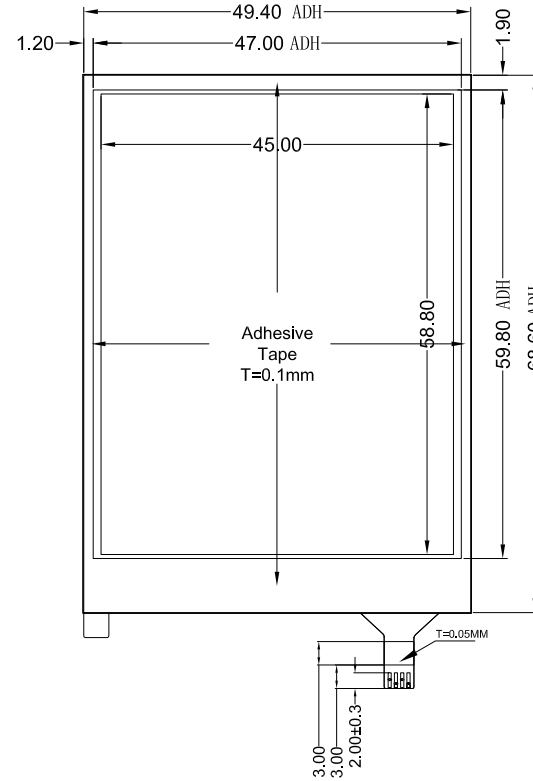
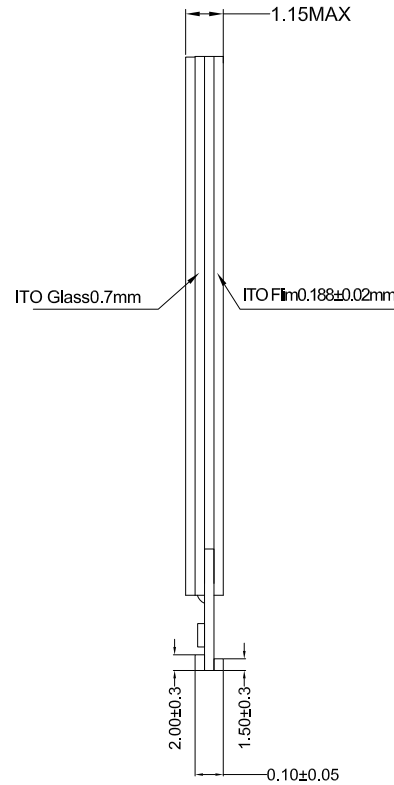


Customer Approved by:


REV	DESCRIPTION	DESIGN	DATE
A	1'ST DEGIN	JIM	Jun-8-2013
B	Modify TP Viewing Area,Active Area	JIM	Jan-19-2015
C	Modify TP Viewing Area,FPC,ICON	JIM	Feb-19-2017

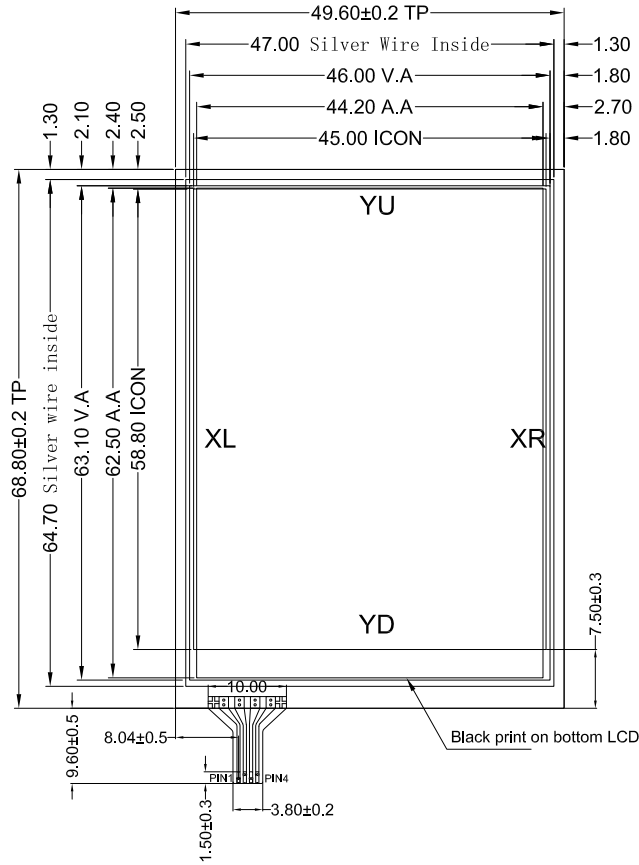

- Notes:
- Type: Film to Glass
 - Operating Voltage: ≤10V
 - operation Temperature: -10°C ~ 60°C
Storage Temperature: -20°C ~ 70°C
 - Life Time: ≥1,000,000 times
 - Connect Material: FPC
 - Response Time: ≤10ms
 - Linearity: ≤1.5%
 - Transmittance: ≥80%
 - Surface Hardness: ≥3H (Pencil)
 - operation force: 20g ~ 100g
 - Resistance:
(Clear hard ITO Film) x: 150Ω ~ 500Ω
(Stand ard ITO Glass) y: 350Ω ~ 850Ω
 - Unspecified Tolerance: ±0.20



PIN	WIRING
1	YU
2	XL
3	YD
4	XR

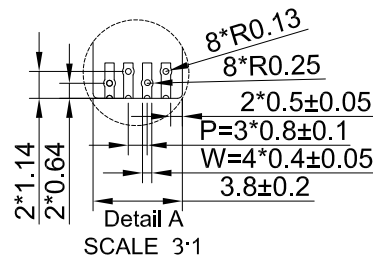



buydisplay.com

深圳旭日东方科技有限公司

EASTRISING TECHNOLOGY CO.,LTD

TEL:86-755-33503874 33503873 33503871 FAX:86-755-33507642-801

APPROVALS		DATE	Part Number :	PROJECTION	GENERAL TOL.		UNITS
APP	HK				ER-TP028-4.1	SCALE:	N.T.S.
JIM		130608	DO NOT SCALE THIS DRAWING.		SHEET:	1	