
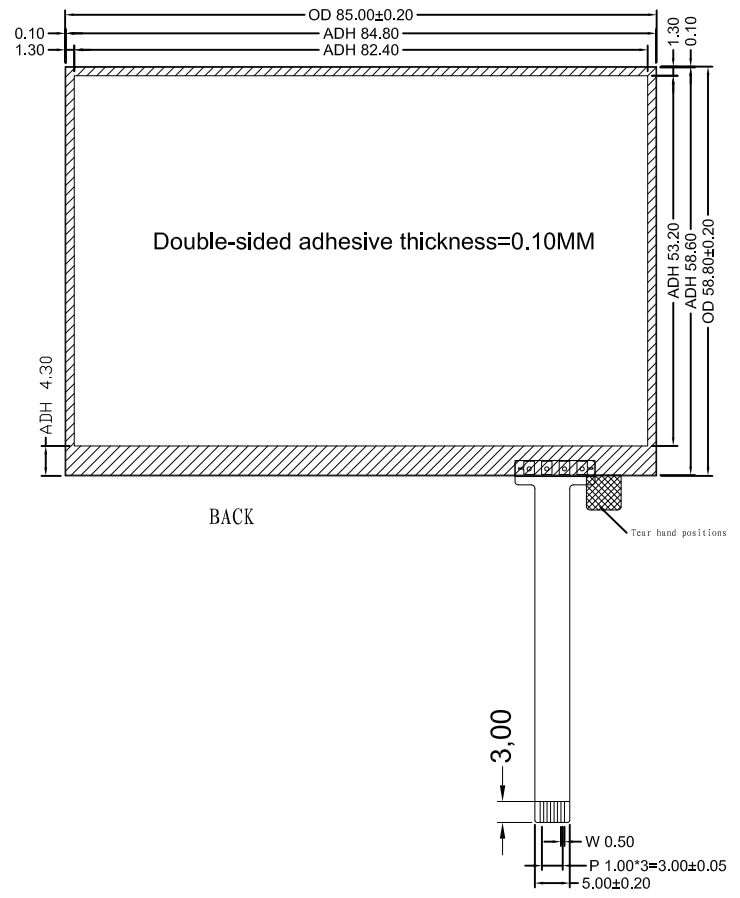
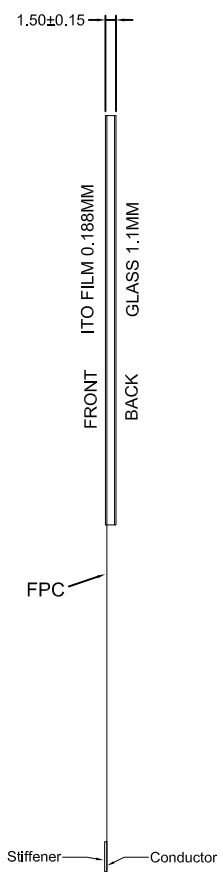



EastRising Technology Co.,Ltd 旭日东方科技 web: www.lcd-china.com Email: market@lcd-china.com

Customer: _____ Customer NO.: _____ Customer Approve By: _____

REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST,DESIGN	JIM	2012.12.17
A1			
A2			

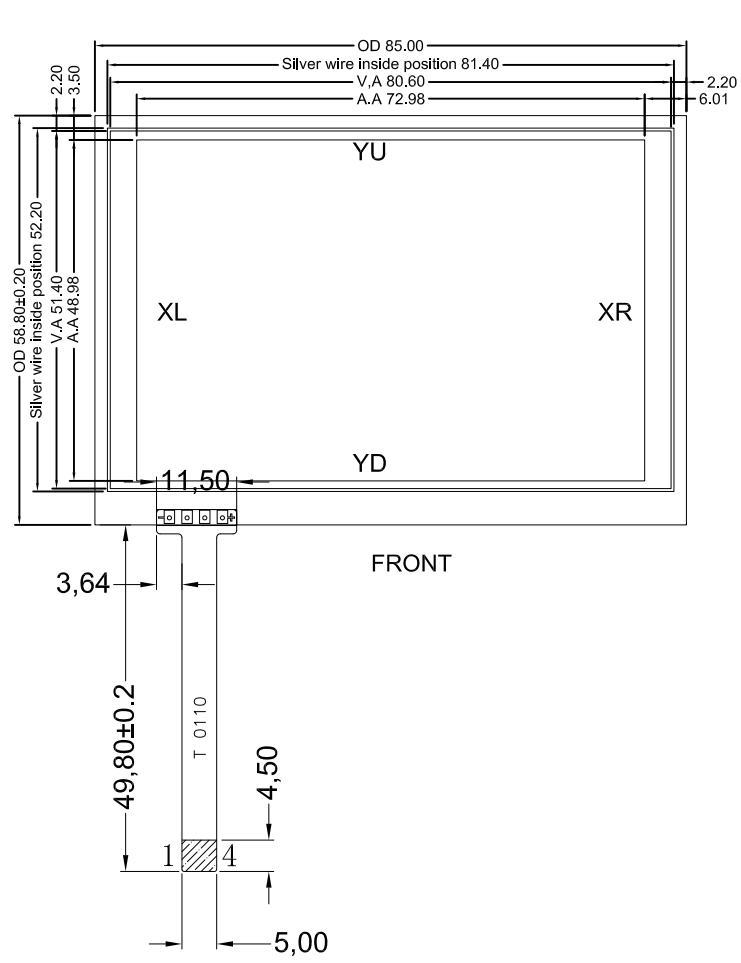

- Note:
- Structure: Film+glass+FPC
 Film: Bright screen (0.188mm)
 Glass: 500Ω/□ (1.1mm)
 Tail: FPC (pitch=1.0mm)
 Thickness: 1.5±0.15mm
 - Operating voltage: 5.0V
 - Voltage: DC 5V 1mA
 - Insulation resistance: ≥20MΩ(25V DC)
 - Impedance: X: 100-640Ω Y: 300-1100Ω
 - Response time <10ms
 - Surface hardness ≥3H
 - Transmittance: ≥75%
 - Operation force: 40-100g
 - Life time: ≥1,000,000次
 - Operating temp: -20℃~+70℃, ≤90%RH
 - Storage temp: -30℃~+80℃, ≤90%RH
 - Tolerance: ±0.20



PIN	WIRING
1	XL
2	YD
3	XR
4	YU

EastRising Technology Co.,Ltd
 旭日东方科技有限公司
www.lcd-china.com

CD
UNIT: MM SIZE: A4
SHEET: 1 OF 1

LCM PART NUMBER: ER-TP034-1

REV: A0

DRAWN BY : JIM

CHECKED BY :

APPROVED BY :

EastRising Technology Co.,Ltd 旭日东方科技 web: www.lcd-china.com Email: market@lcd-china.com