


Circuit Diagram


| NO. | SYMBOL |
|-----|--------|
| 1 | XL |
| 2 | YD |
| 3 | XR |
| 4 | YU |

| REV | DESCRIPTION | DESIGN | DATE |
|-----|-----------------------------------|--------|-------------|
| A | New desgin | Tony | Jul-18-2013 |
| B | Correct Pin Number and FPC Length | Javon | Jan-24-2015 |
| | | | |
| | | | |

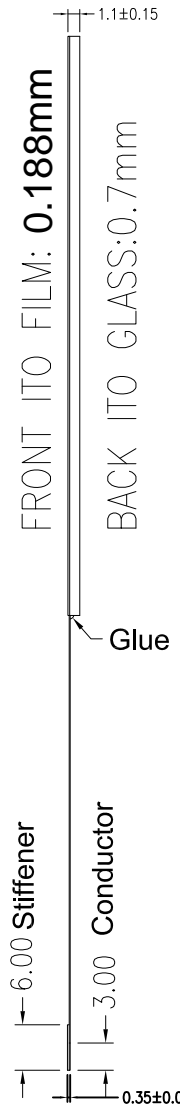

Note:

1. Structure: Film+Glass+FPC
 Film: Fog Screen (0.188mm)
 Glass: 500Ω/□ (0.7mm)
 Connector: FPC (pitch=1.0mm)
 Thickness: 1.1±0.15mm
2. Operating Voltage: 5.0V
3. Voltage: DC5V 1mA
4. Insulation Resistance: ≥20MΩ(25V DC)
5. Linearity: ≤1.5%
6. Transmittance: ≥80%
7. Operation Force: 10-100g
8. Life Time: ≥1,000,000次
9. Operating Temp: -10°C~+60°C, ≤90%RH
10. Storage Temp: -20°C~+70°C, ≤90%RH
11. Tolerance: ±0.20

| | | | |
|---|--------------------|--|-------------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES MILLIMETERS TOLERANCES: ANGLES ±1° .XX" ±.02" .XXX" ±.005" OR 0.Xmm ±0.5mm 0.XXmm ±0.13mm | |  EastRising Technology Co.,Ltd. buydisplay.com | |
| DRAWN BY: TONY | DATE: July-18-2013 | DRAWING NO.: | |
| CHECKED BY: | | ER-TP035-1 | |
| APPROVED BY: | | TITLE: TITLE | SHEET NO.: 1 OF 1 |

