
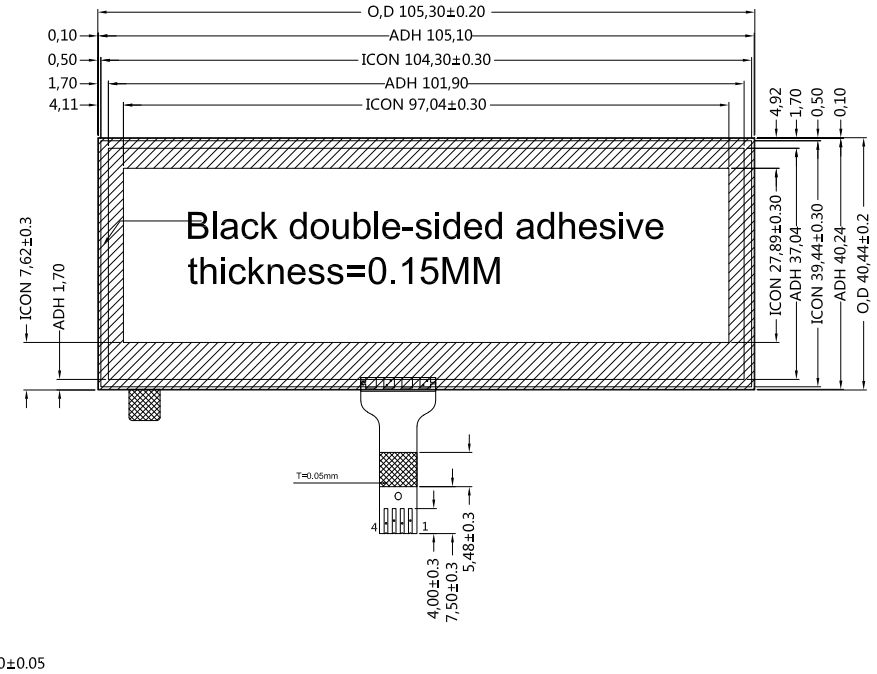


Customer Approved by:


REV	DESCRIPTION	DESIGN	DATE
A	1'ST DEGIN	JIM	Sep-21-2020
B			

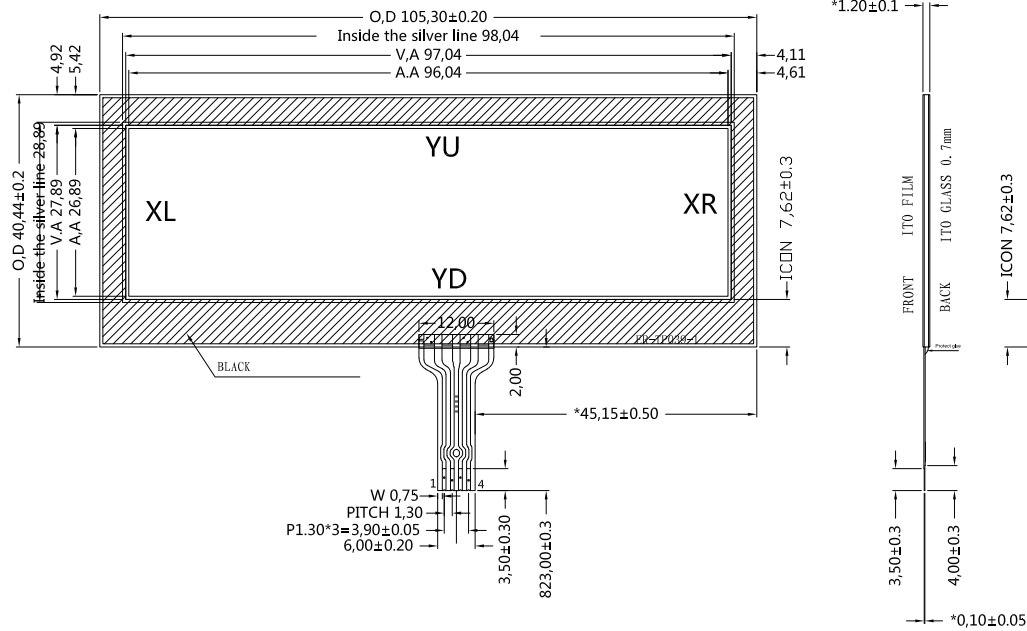

note :

- Construction : Film+Glass+Tail  
ITO Film:Bright screen(联享双膜)  
ITO Glass: (0.7mm)  
Tail:FPC (Pitch=1mm)  
Thickness : 1.1±0.1
- Max Voltage : DC3-15V 1mA
- Insulation Resistance : ≥20MΩ(25V DC)
- Linearity : ≤1.5%
- Optical Characteristics : ≥80%
- Operation Force : 30-80g
- Tapping Durability : ≥1,000,000次
- Pen Sliding Durability : ≥100,000次
- Operating Temperature & Humidity : -20°C~+70°C , ≤90%RH ,
- Storage Temperature & Humidity : -30°C~+80°C , ≤90%RH
- Hardness:3H
- Chattering Time: <10ms,
- Terminal Resistance:X:1200-2000,Y:50-300
- Tolerance±0.20mm

Pin NO:	Assignment
1	YU(Y-)
2	XL(X-)
3	YD(Y+)
4	XR(X+)



Circuit Diagram



旭日东方科技有限公司  
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	SCALE: N.T.S.	SHEET: 1
APP			ER-TP039-1			
CHK						
DWN	JIM	Sep-21-20	DO NOT SCALE THIS DRAWING.			