

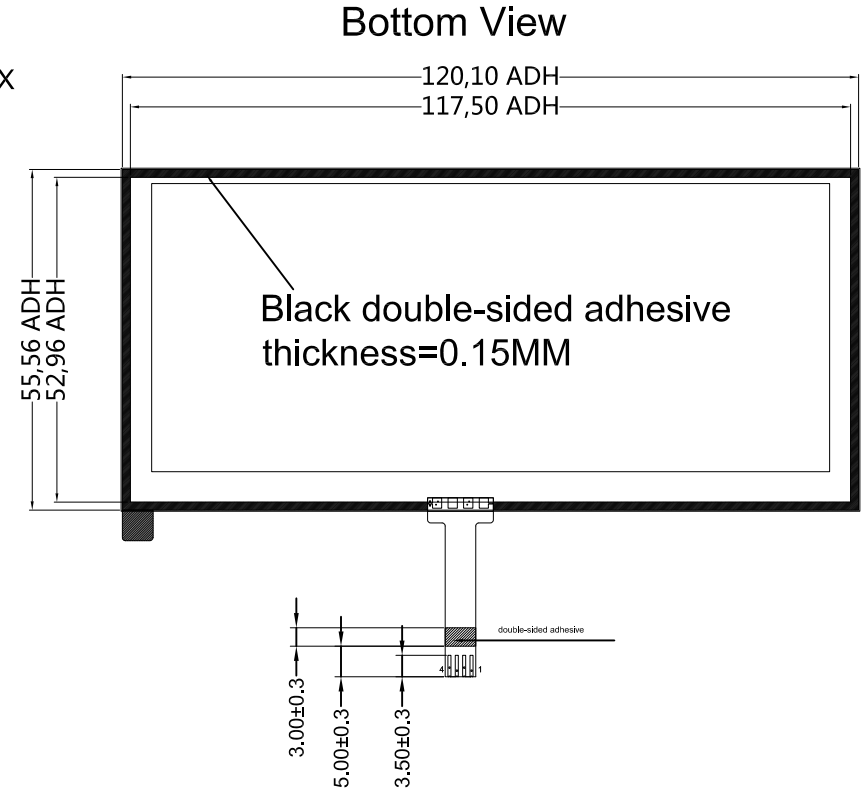
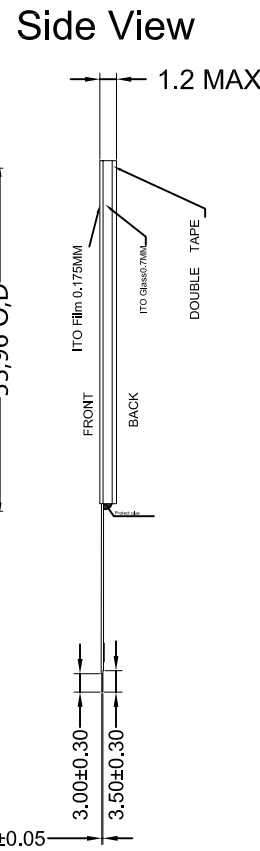



REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
1.0	1'ST DESIGN	JIM	May-17-2019

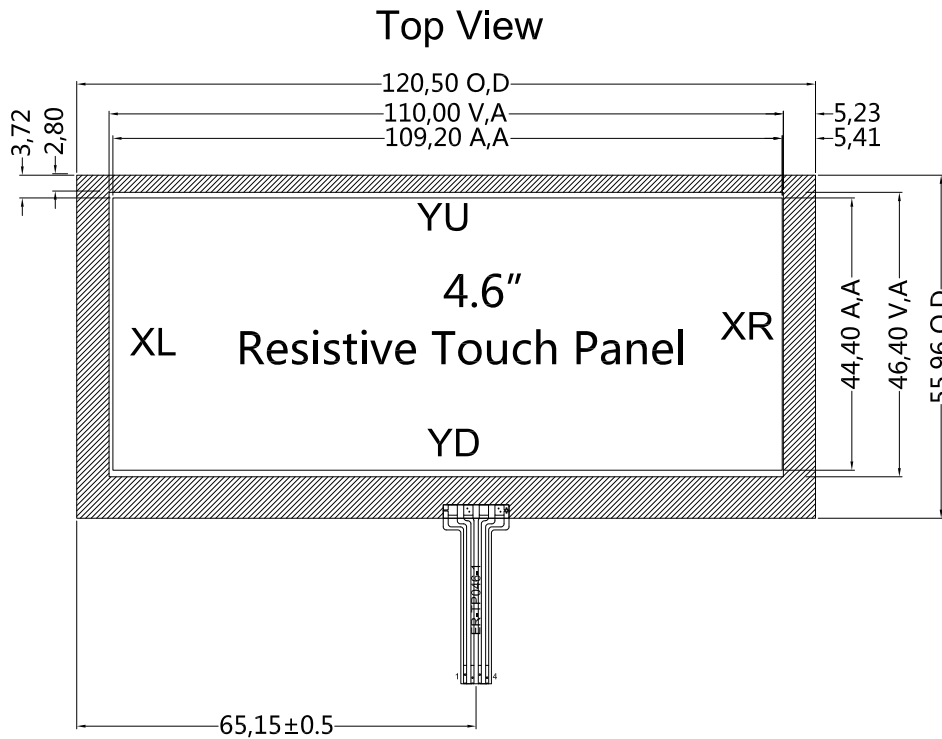

- Notes:
- Type: film+glass+FPC
Film: Matte screen (0.175mm)
 - Operating Voltage: 3V 5V
 - operation Temperature: -10°C~60°C <=90%RH
Storage Temperature: -20°C~70°C <=90%RH
 - Life: 1,000,000 times
 - Response Time: ≤10ms
 - Linearity: ≤1.5%
 - Transmittance: ≥80%
 - Surface Hardness: 3H(Pencil)
 - operation force: 20-100g
 - Resistance:
(ITO Film)x: TBD
(ITO Glass)y: TBD
 - Unspecified Tolerance: ±0.20
 - ROHS Standard
 - OD: Outline Dimension
 - VA: Visual Area
 - AA: Active Area

Pin NO:	Assignment
1	YU(Y-)
2	XL(X-)
3	YD(Y+)
4	XR(X+)






EastRising
buydisplay.com

旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com Email: sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL.		UNITS
APP	CHK				SCALE:		MM
DWN	JIM	May-17-19	ER-TP046-1		N.T.S.		
DO NOT SCALE THIS DRAWING.					SHEET:	1	