

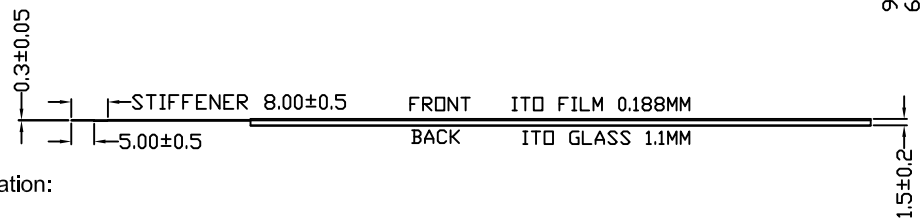
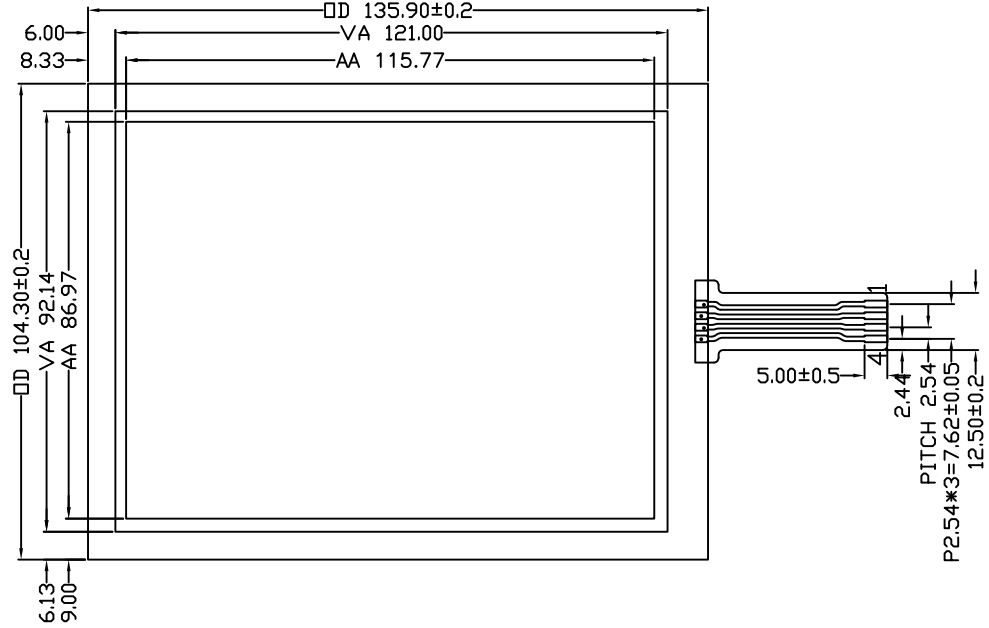


REV.	DESCRIPTION	REVISER	DATE
A0	Preliminary Release	xiaoyun	June-7-2011

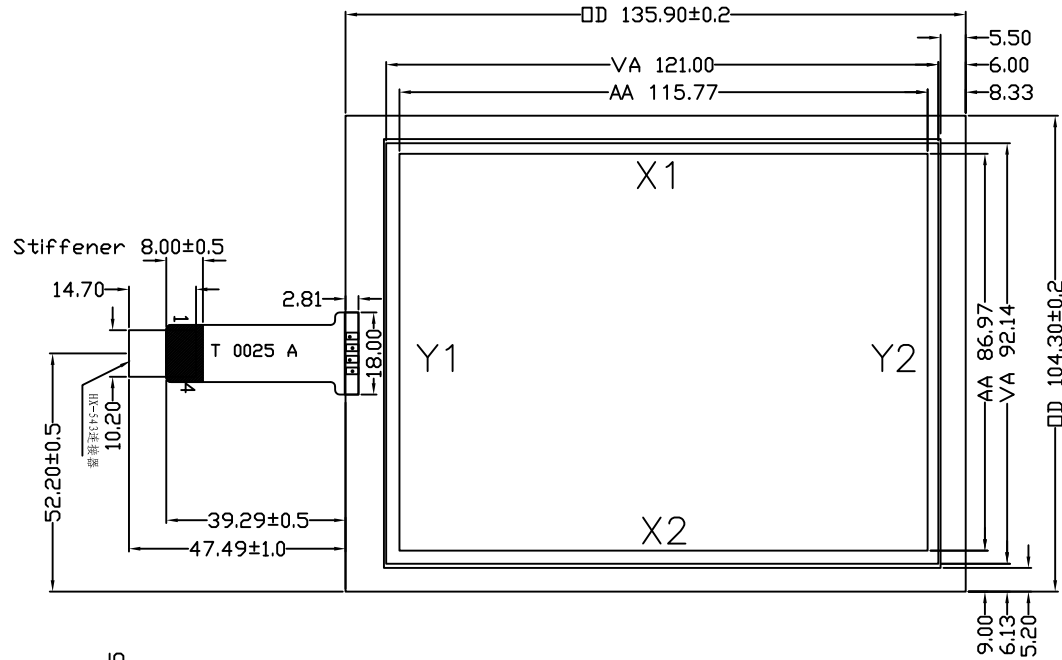

Specification:

- Structure: Film + Glass + FPC
Film: Fog Screen (0.188mm)
Total Thickness: 1.5 ± 0.20
- Connector: FPC (Pitch=2.54mm)
- Voltage: DC5V 1mA
- Insulation Resistance: $\geq 20M\Omega$ (25V DC)
- Point Resistance: X: 290-530 Ω Y: 500-930 Ω
- Transmittance: $\geq 78\%$
- Operation Force: 20-80g
- Response Time: <10ms
- Surface Hardness: 3H
- Operating Temp: -10 $^{\circ}C$ to +60 $^{\circ}C$ $\leq 90\%RH$
- Storage Temp: -20 $^{\circ}C$ to +70 $^{\circ}C$ $\leq 90\%RH$
- RoHs Compliance



Logic Schematic

PIN	WIRING
1	X1
2	Y1
3	X2
4	Y2

Logic Table

EastRising Technology Co.,Ltd

buy-display.com

GENERAL TOL	ALL UNITS:	DATE	MODEL NUMBER :		SHEET: 1 OF 1
0.20	mm	06/07	ER-TP057-1		DATE:
DWN: HUC	CHK:		DO NOT SCALE THIS DRAWING.	PROJECTION	2011/06/07