




REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
1.0	1'ST DESIGN	JIM	May-17-2019

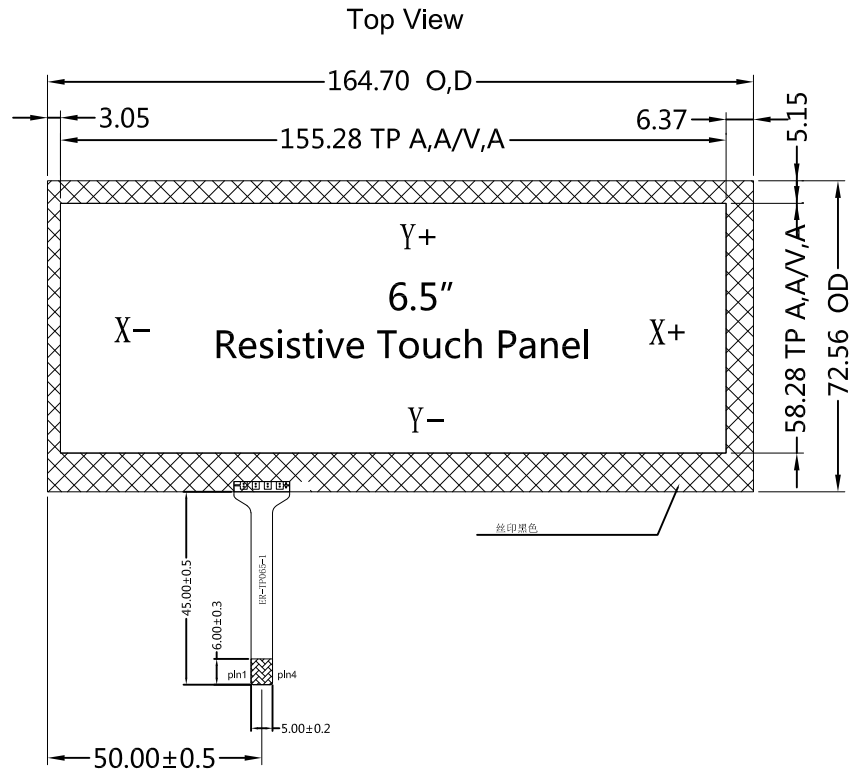

Side View

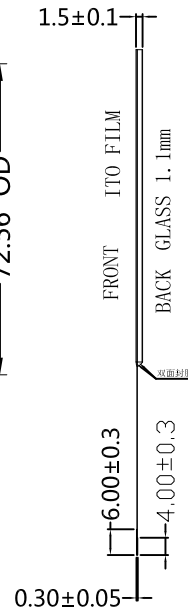


Bottom View

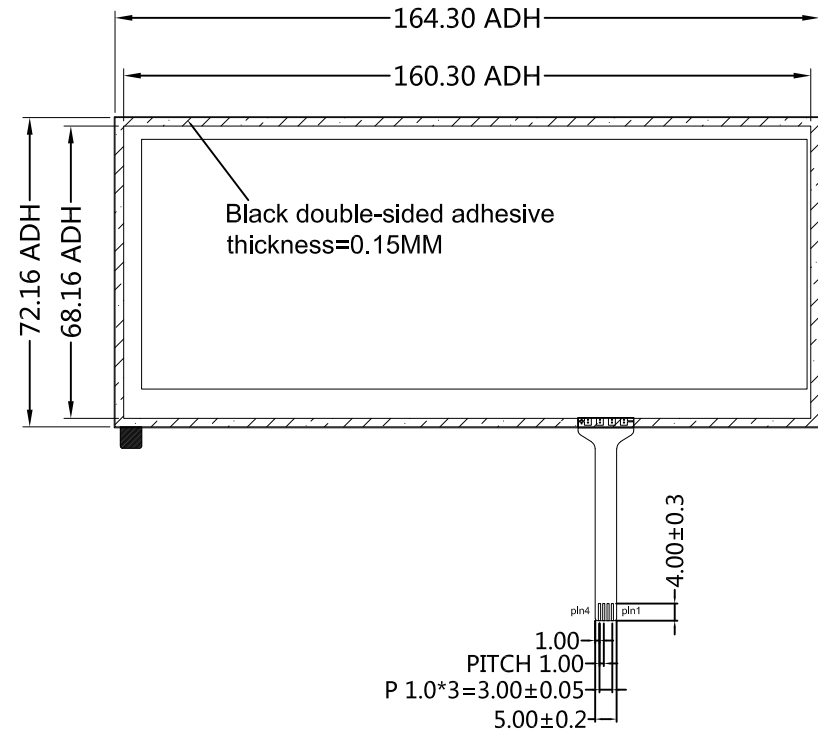

Note :

- Structure : film+glass+FPC
 Film:Bright screen (0.188mm)
 Glass:500Ω/□ (1.1mm)
 Tail:FPC (pitch=1.0mm)
- Operating voltage : 3-5.0V
- Voltage : DC5V 1mA
- Insulation resistance : ≥20MΩ(25V DC)
- Linearity : ≤1.5%
- Transmittance : ≥80%
- Operation force : 20-100g
- Life time : ≥1,000,000
- Operating temp : -10°C~+60°C , ≤90%RH
- Storage temp : -20°C~+70°C , ≤90%RH
- X:TBD Y:TBD
- Tolerance±0.20
- OD:Outline Dimension
- VA:Visual Area
- AA:Active Area



Pin NO:	Assignment
1	X-
2	Y-
3	X+
4	Y+



旭日东方科技有限公司
 EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	GENERAL TOL.	UNITS
APP			ER-TP065-1	SCALE:	MM
CHK				N.T.S.	
DWN	JIM	May-17-19	DO NOT SCALE THIS DRAWING.	SHEET:	1

