





REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST,DESIGN	JIM	Sep-18-2019
A1			
A2			

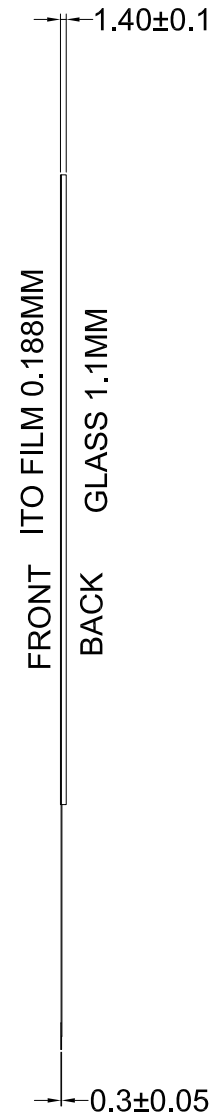

Pin NO:	Assignment
1	XL
2	YD
3	XR
4	YU

- Note:
- Structure: Film+Glass+FPC  
 Film: anti-glare hard coating, anti-newton Ring (0.188mm)  
 Glass: (1.1mm)  
 Tail: FPC (Pitch=1.0mm)
  - Operating Voltage: DC 3-5.0V
  - Hardness: 3H
  - Insulation Resistance: ≥20MΩ(25V DC)
  - Response time: <10ms
  - Transmittance: ≥75%
  - Operation Force: 60-150g
  - Life Time: ≥1,000,000
  - Operating Temp: -10°C~+60°C, ≤90%RH
  - Storage Temp: -20°C~+70°C, ≤90%RH
  - Impedance: Y: 300-800Ω X: 180-600Ω
  - ROHS: YES
  - OD: Outline Dimension
  - VA: Visual Area
  - AA: Active Area

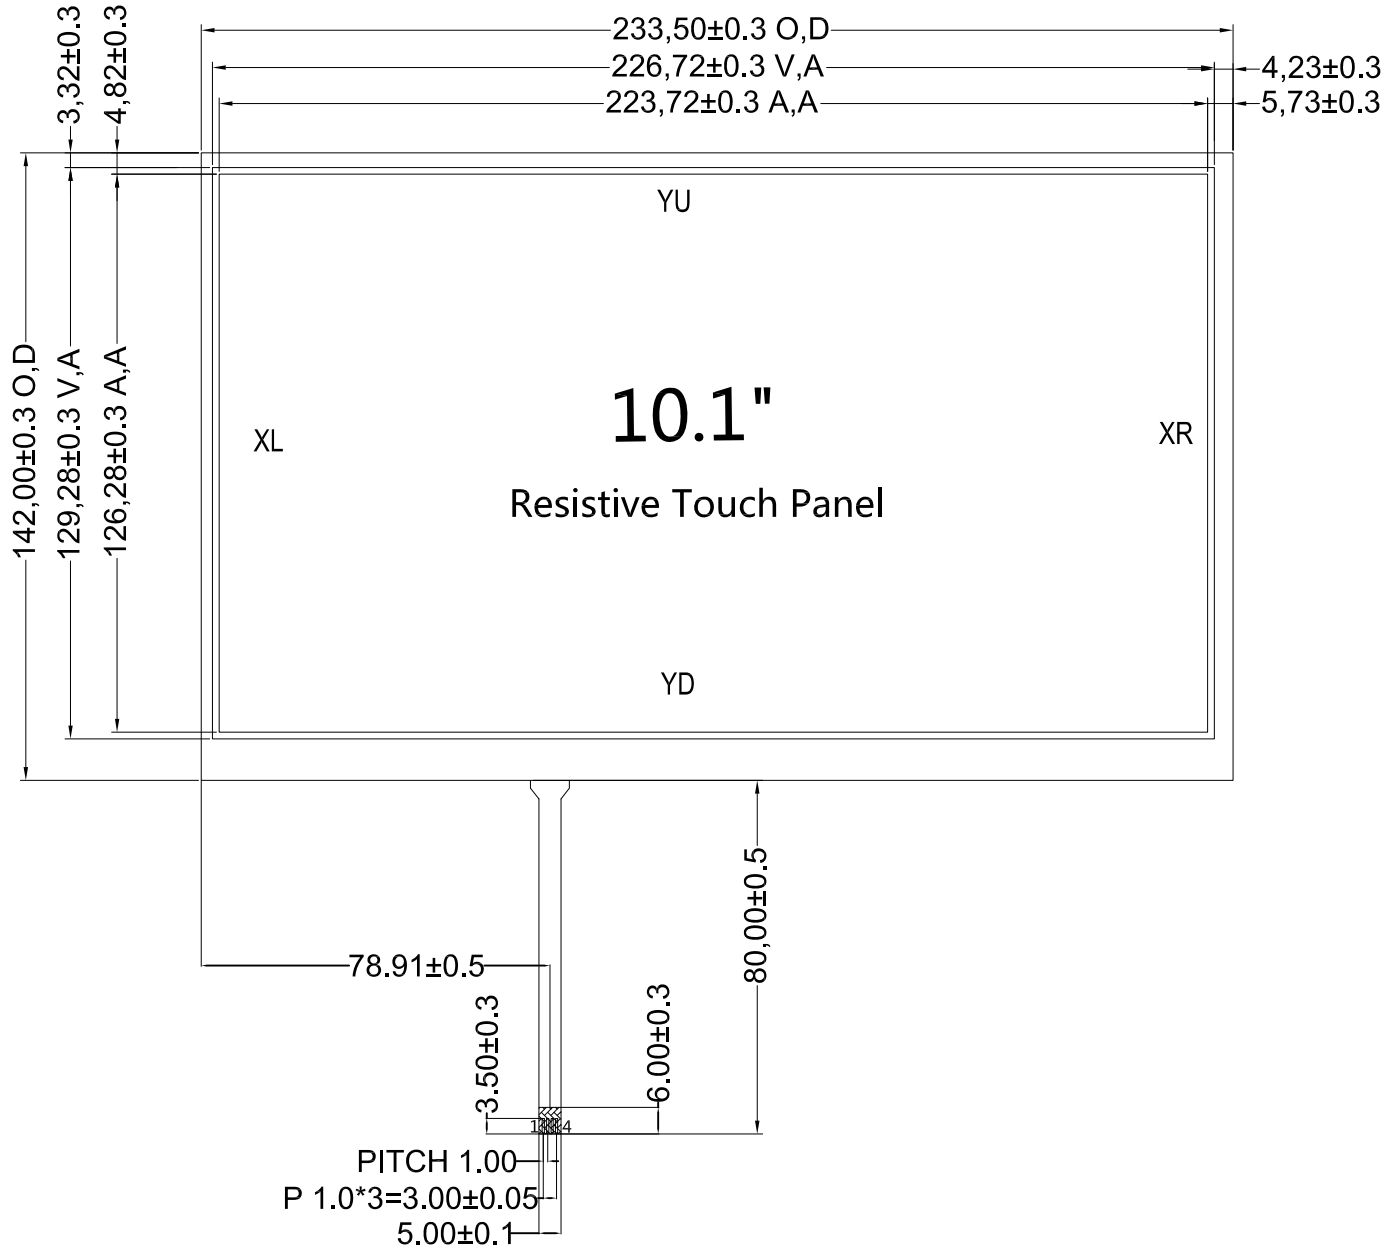

深圳旭日东方科技有限公司  
**EASTRISING TECHNOLOGY CO.,LTD**

Web: [www.buydisplay.com](http://www.buydisplay.com) Email: [sales@buydisplay.com](mailto:sales@buydisplay.com)

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL. UNITS MM	
APP	CHK	DATE			VERSION	UNITS
	JACK	Sep-18-2019	ER-TP101-2	SCALE 1:1	SHEET:	A0
DWN	JIM	Sep-18-2019				1