

NOTES:




- 1.The General Torlance is $\pm 0.20\text{mm}$.
- 2.All materials in the drawing Comply with the RoHS.

Ver	Date	History	Name	Data
Ver	A0	First Ver	Jim	Jul-07-2023

Top View

Side View

Bottom View

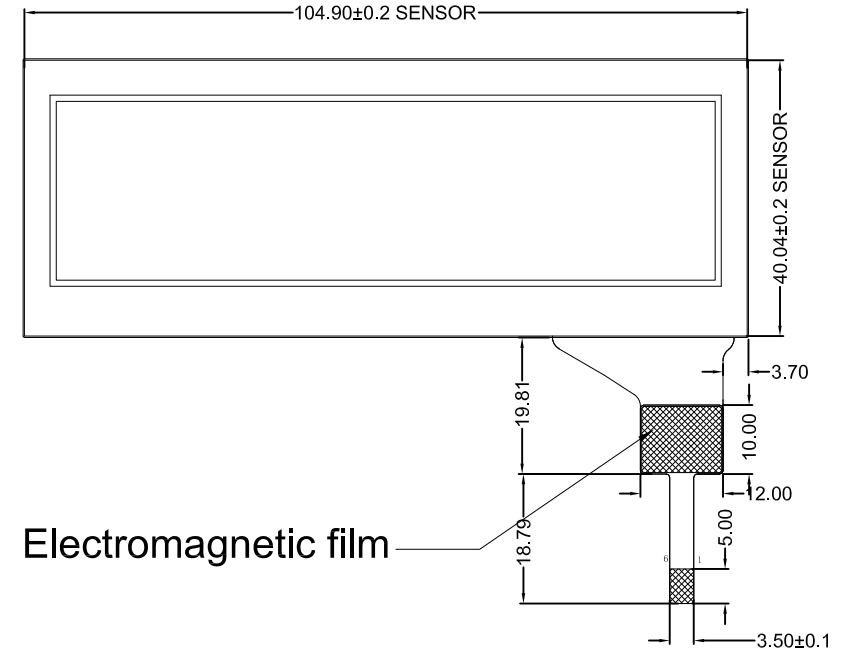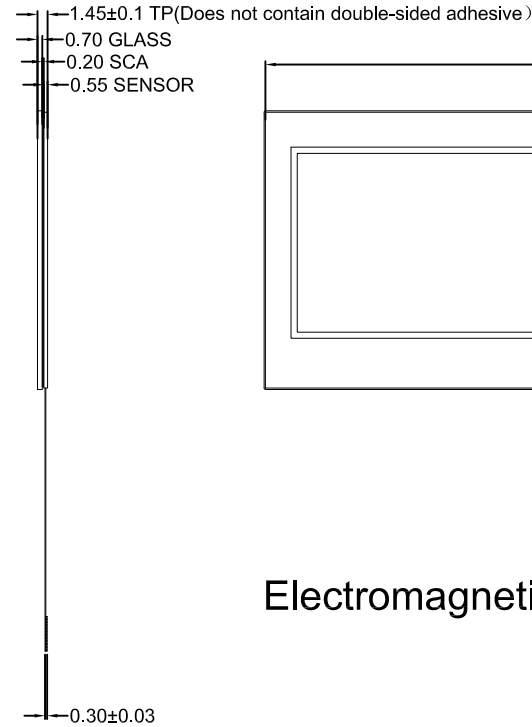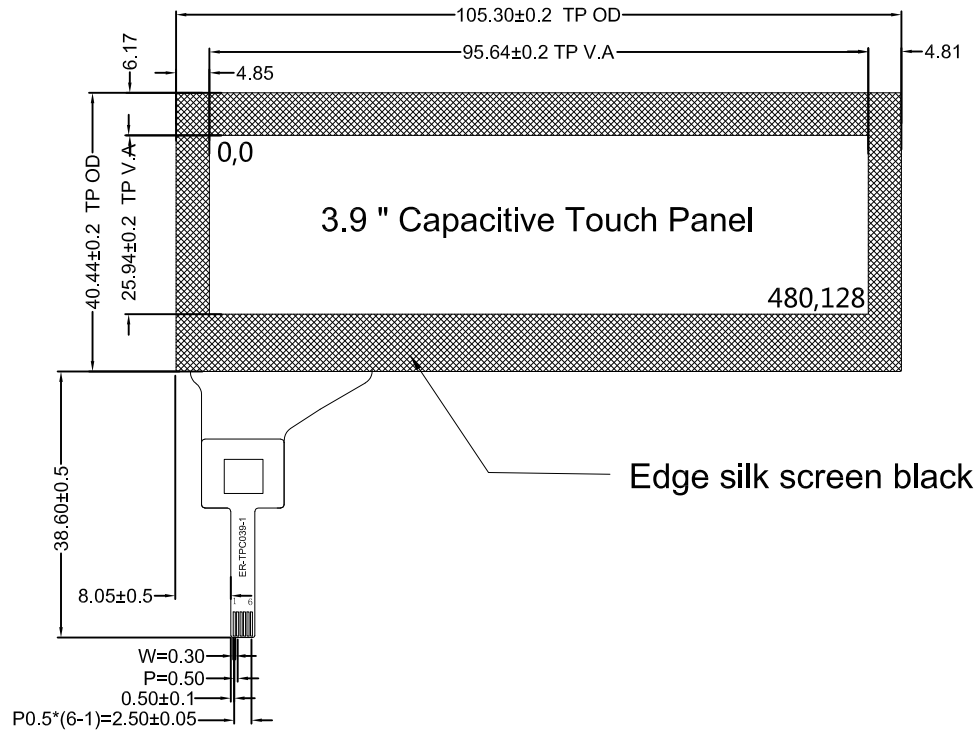


Item	Specification
1.Type	G+G
2.Operating Voltage	2.8-3.3V
3.Operation Temperature	-20℃~70℃
4.Storage Temperature	-30℃~80℃
5.Connect Material	FPC
6.Light Transparency	>=83% Min.
7.Surface Hardness	6H
8.Drive IC	GT911
9.Points	5-point touch Gesture

PIN#	ASSIGNMENT
1	SCL
2	SDA
3	VDD
4	RESET
5	INT
6	GND

深圳旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com Email: sales@buydisplay.com

APPROVALS	DATE	MODEL NUMBER : ER-TPC039-1		GENERAL TOL.	UNITS
APP	CHK			VERSION	MM
JACK	JUN-06-2023			A0	
DWN	JIM	JUN-06-2023	DO NOT SCALE THIS DRAWING.	SHEET:	1