




REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST,DESIGN	Jim	Jun-02-2021
A1	2'ED,DESIGN	Jim	Dec-15-2021

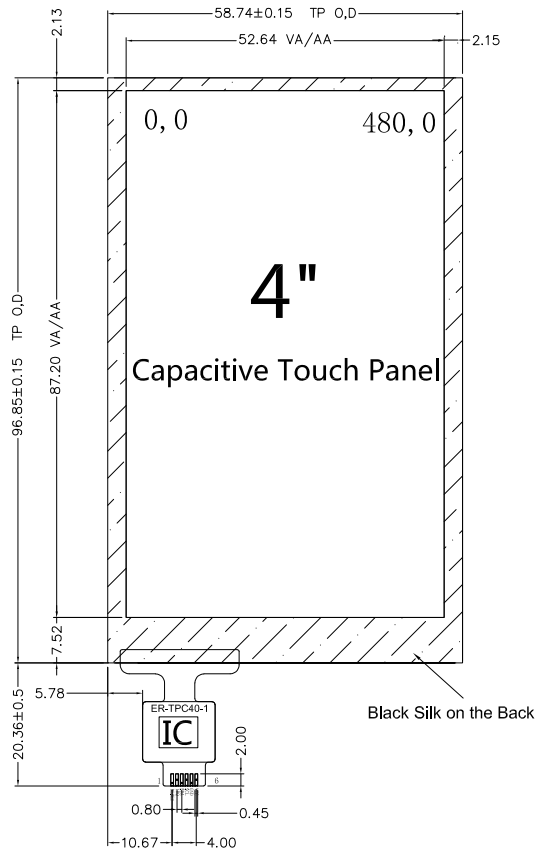

Front View

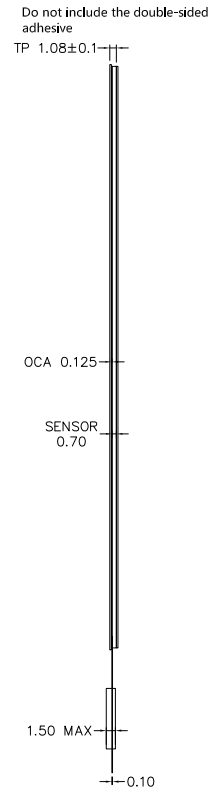

Side View

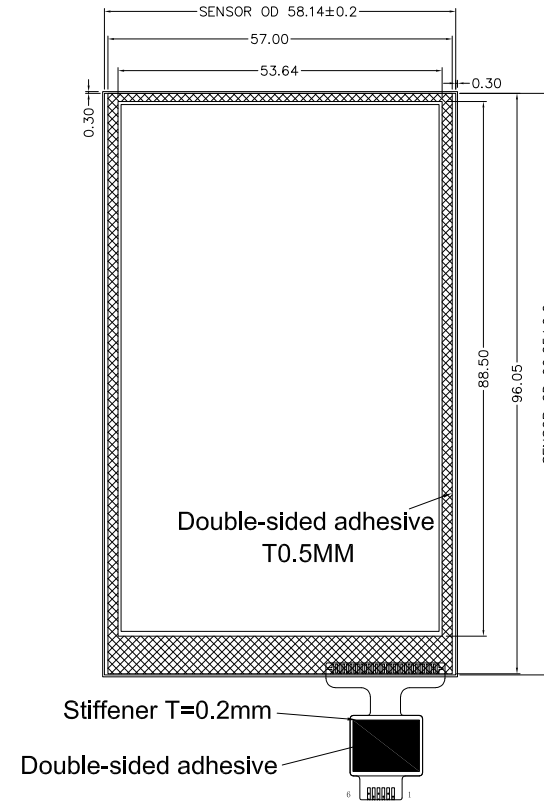


Back View

Pin Assignment

PIN NO.	SIGNAL	DESCRIPTION
1	/RESET	Chip Reset
2	/INT	Interrupt Signal
3	SDA	I2C Data Line
4	SCL	I2C Clock Line
5	GND	Ground Connection
6	VDD	Supply Voltage

NOTE:

- 1.TYPE:P+G
- 2.OPERATING VOLTAGE: 2.8-3.3V
- 3.TRANSMITTANCE: >= 83%
- 4.SURFACE HARDNESS:>=3H
- 5.OPERATING TEMP: -20 ~ +70°C
- 6.STORAGE TEMP: -30 ~ +80°C
- 7.TOLERANCE:±0.20
- 8.Controller: FT6336U



深圳旭日东方科技有限公司  
EASTRISING TECHNOLOGY CO.,LTD

www.buydisplay.com      sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	GENERAL TOL.	UNITS
APP			ER-TPC040-1	SCALE:	MM
CHK				N.T.S.	
DWN	JJM	Dec-15-21	DO NOT SCALE THIS DRAWING.	SHEET:	1