


NOTES:


- 1.The general tolerance is $\pm 0.20\text{mm}$.
- 2.All materials in the drawing comply with the RoHS.

VER	DESCRIPTION	DATE
A0	NEW DESIGN	Jul-09-2015


Top View

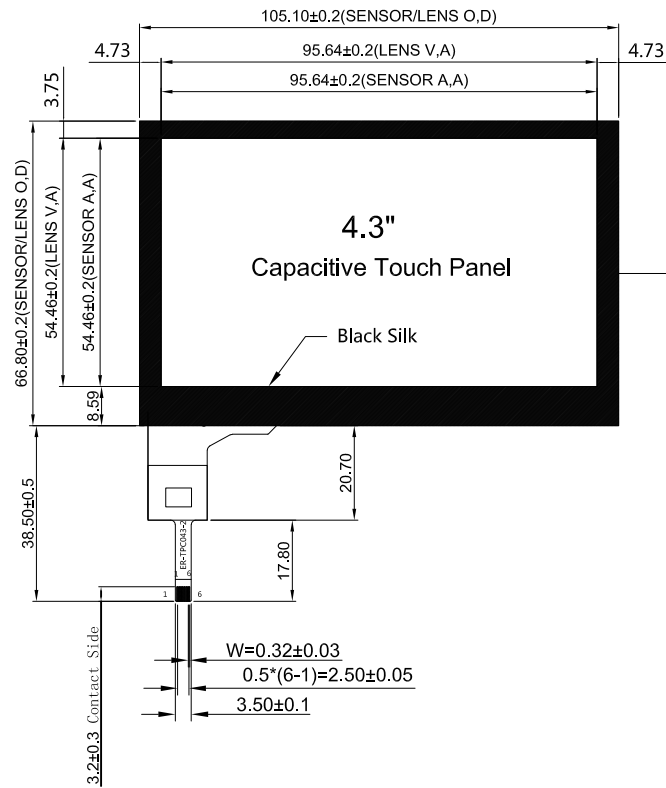

Side View

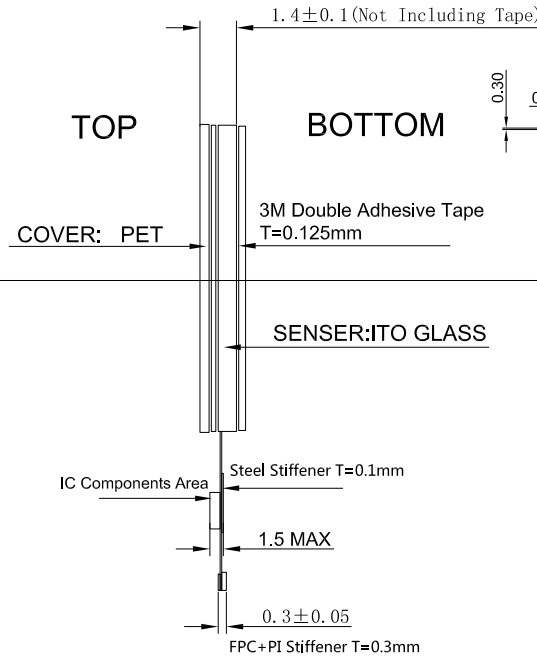



Bottom View

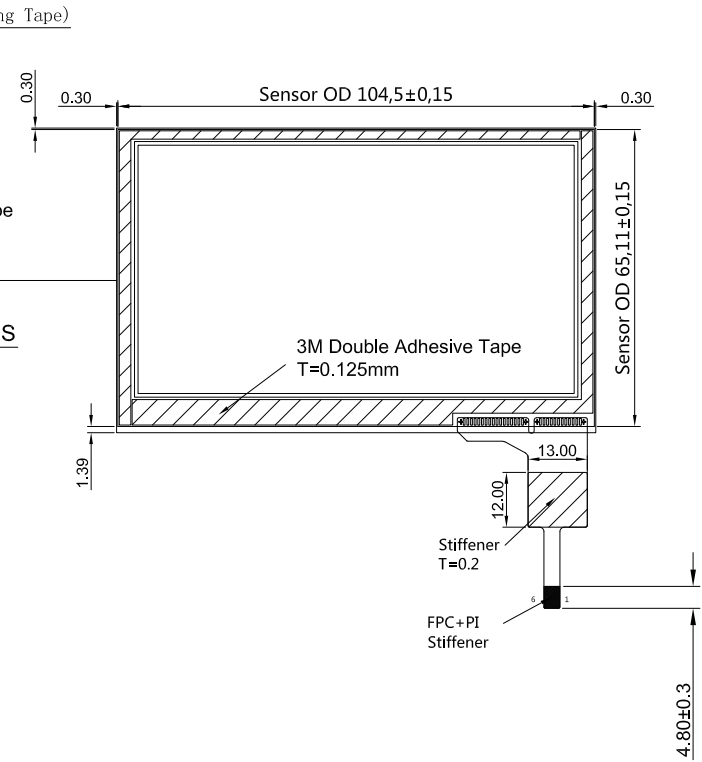

Item	Specification
1.Type	P+G
2.Operating Voltage	1.8V~3.5V
3.Operation Temperature	-20°C~70°C
4.Storage Temperature	-30°C~80°C
5.Connect Material	FPC
6.Response Time	≤25ms
7.Light Transparency	87% Min.
8.Surface Hardness	≥6H(Pencil)

IC	FT5206
PIN#	ASSIGNMENT
1	SCL
2	SDA
3	VDD
4	RESET
5	INT
6	GND


旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD
 Web: www.buydisplay.com Email: sales@buydisplay.com

APPROVALS	DATE	MODEL NUMBER :	 GENERAL TOL. UNITS SCALE: N.T.S. MM
APP		ER-TPC043-2	
CHK		DO NOT SCALE THIS DRAWING.	SHEET: 1
DWN	JIM Jul-09-15	PROJECTION	