



Customer:	Customer NO.:	Customer Approve By:	REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
			A0	1'ST.DESIGN	JIM	30-May-2018
			A1			
			A2			

Capacitive Touch USB Driving Board

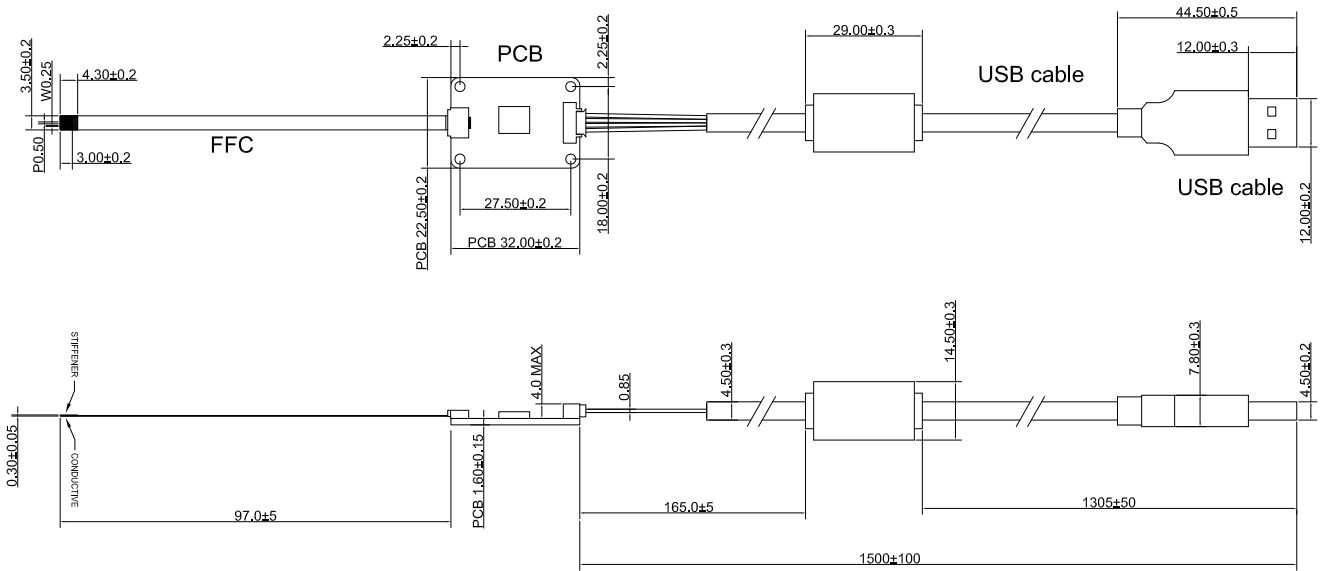

Capacitive Touch Screen

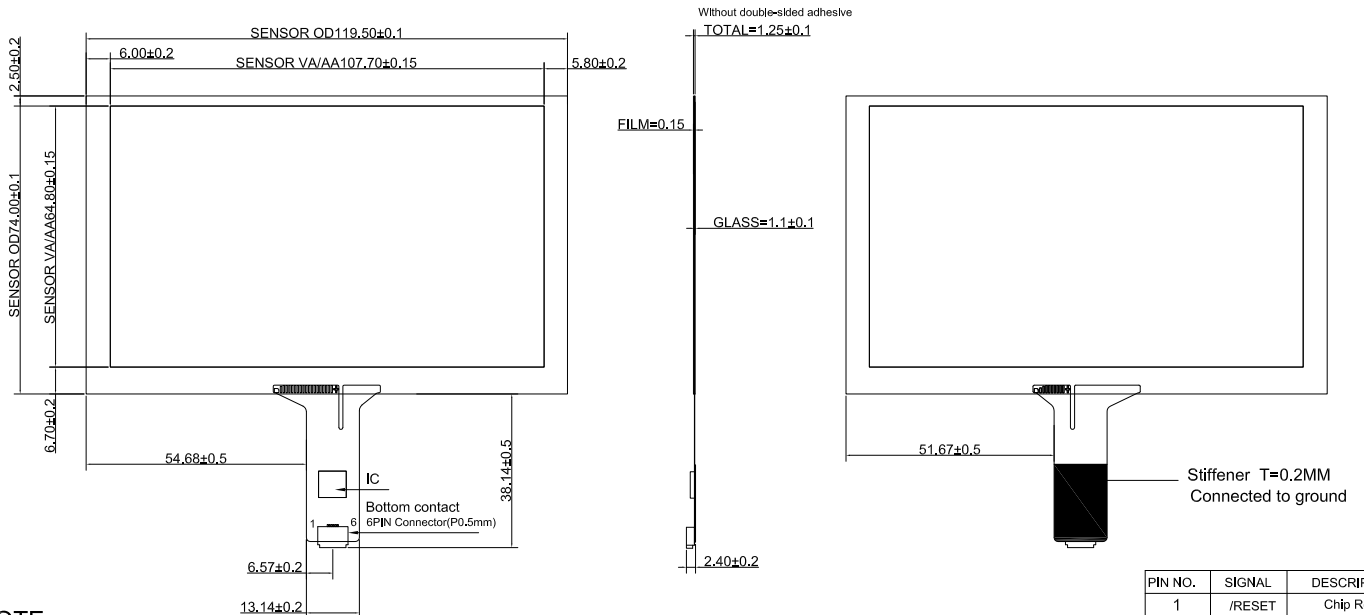

NOTE:

- 1.G+FLIM
ITO GALSS:1.1MM
Explosion-Proof Membrane:0.15MM
- 2.IC: GT911+USB DRIVE BOARD
- 3.OPERATING VOLTAGE: 2.8-3.3V
- 4.TRANSMITTANCE: >= 80%
- 5.SURFACE HARDNESS: 3H
- 6.OPERATING TEMP: -20 ~ +70°C ≤90%RH
- 7.STORAGE TEMP: -30 ~ +80°C ≤90%RH

PIN NO.	SIGNAL	DESCRIPTION
1	/RESET	Chip Reset
2	VDD	Supply Voltage
3	GND	Ground Connection
4	/INT	Interrupt Signal
5	SDA	I2C Data Line
6	SCL	I2C Clock Line

 EastRising Technology Co.,Ltd 旭日东方科技有限公司 buydisplay.com	 CD
	UNIT: MM SIZE: A4 SHEET: 1 OF 1
LCM PART NUMBER: ER-TPC050-5-USB REV: A0	
DRAWN BY :JIM	CHECKED BY :JAVEN APPROVED BY : TONY