

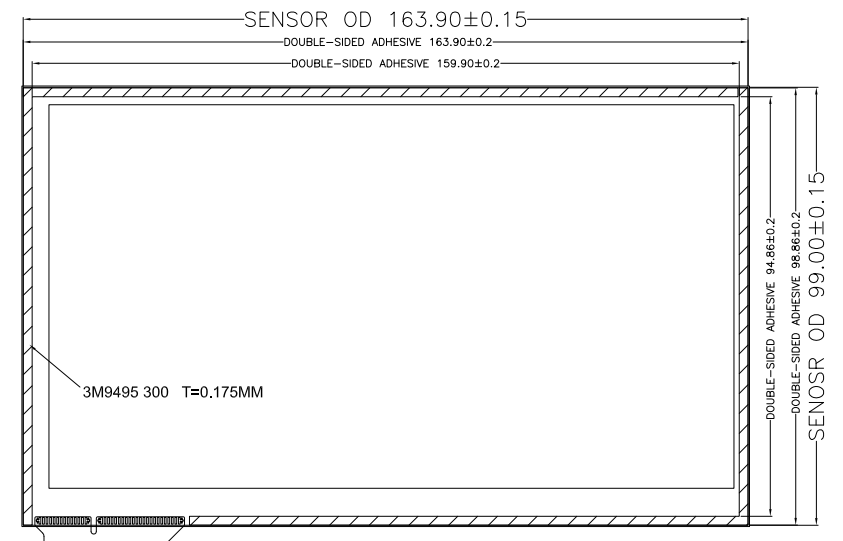


REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST,DESIGN	JIM	2015-08-05
A1	Modify the FPC and the total thickness	JIM	2015-08-10
A2			

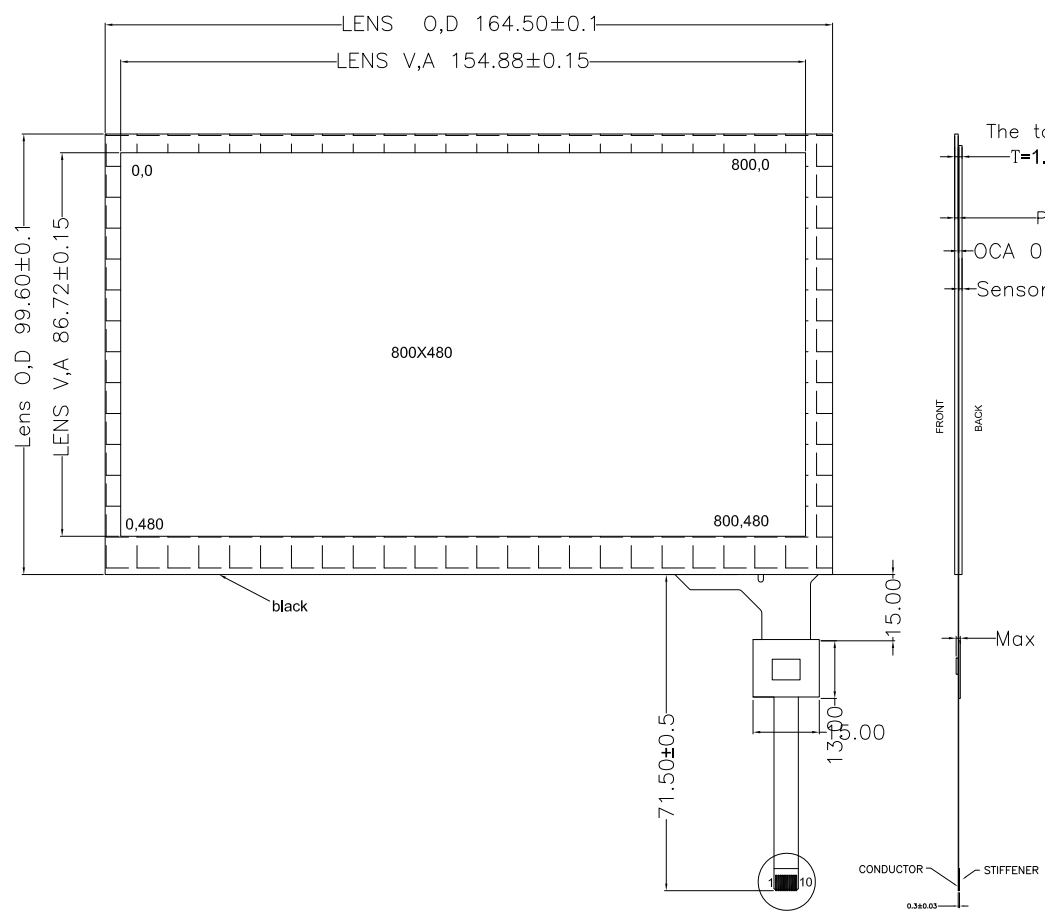

PIN NO.	SIGNAL	DESCRIPTION
1	GND	Ground Connection
2	SDA	I2C Data Line
3	SCL	I2C Clock Line
4	RESET	Chip Reset
5	INT	Interrupt signa
6	NC	No Connection
7	VDD	Supply voltage
8	VDD	Supply voltage
9	GND	Ground Connection
10	GND	Ground Connection

- NOTE:**
- 1.G+P  
ITO GALSS:1.1MM  
PET:0.25MM
  - 2.IC: FT5316
  - 3.OPERATING VOLTAGE: 2.8-3.3V
  - 4.TRANSMITTANCE: >= 85%
  - 5.SURFACE HARDNESS: >3H
  - 6.OPERATING TEMP: -20 ~ +70°C
  - 7.STORAGE TEMP: -30 ~ +80°C

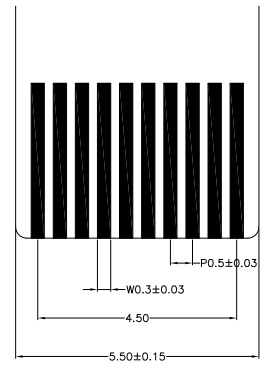

Scale:10:1

EastRising Technology Co.,Ltd  
旭日东方科技有限公司

buydisplay.com

UNIT: MM

SHEET: 1 OF 1

CD

SIZE: A4

LCM PART NUMBER: ER-TPC070-6

REV: A0

DRAWN BY :JIM

CHECKED BY :JAVEN

APPROVED BY : TONY