



|           |               |                      |      |                       |           |             |
|-----------|---------------|----------------------|------|-----------------------|-----------|-------------|
| Customer: | Customer NO.: | Customer Approve By: | REV. | DESCRIPTION OF MODIFY | MODIFY BY | DATE        |
|           |               |                      | A0   | 1'ST,DESIGN           | JIM       | 30-May-2018 |
|           |               |                      | A1   |                       |           |             |
|           |               |                      | A2   |                       |           |             |

Capacitive Touch USB Driving Board

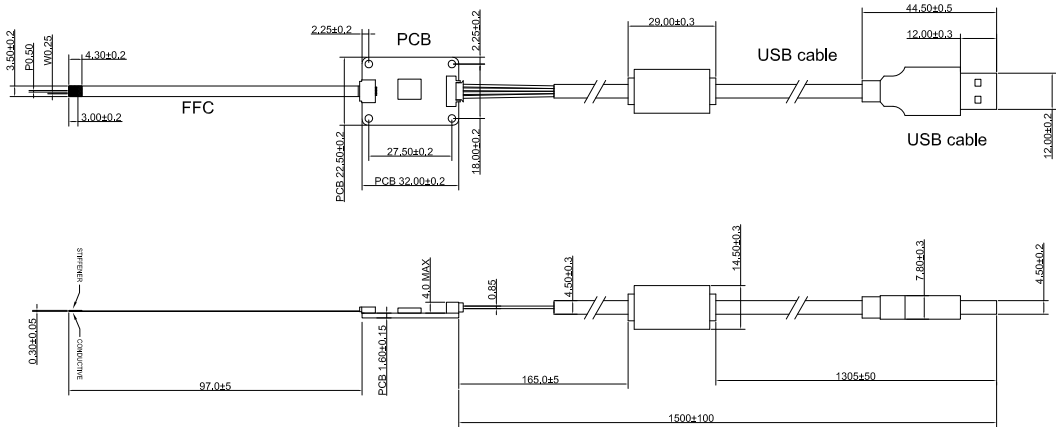

Capacitive Touch Screen

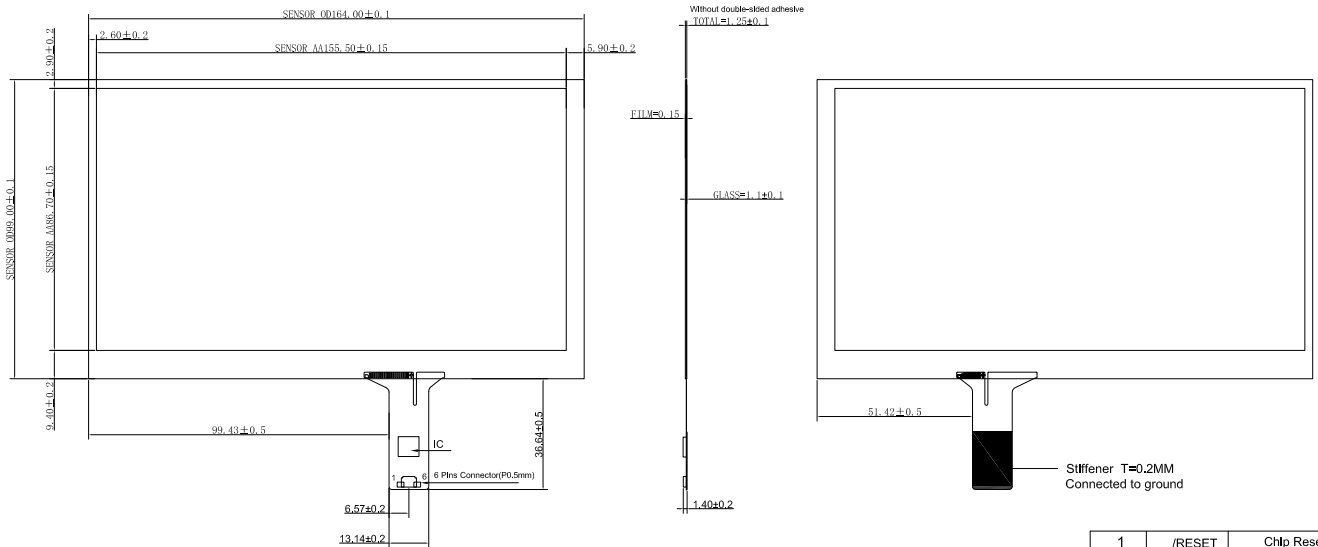

NOTE:

- 1.G+FLIM  
ITO GALSS:1.1MM  
Explosion-Proof Membrane:0.15MM
- 2.IC: GT911+USB DRIVE BOARD
- 3.OPERATING VOLTAGE: 2.8-3.3V
- 4.TRANSMITTANCE: >= 80%
- 5.SURFACE HARDNESS: 3H
- 6.OPERATING TEMP: -20 ~ +70°C ≤90%RH
- 7.STORAGE TEMP: -30 ~ +80°C ≤90%RH

|   |        |                   |
|---|--------|-------------------|
| 1 | /RESET | Chip Reset        |
| 2 | VDD    | Supply Voltage    |
| 3 | GND    | Ground Connection |
| 4 | /INT   | Interrupt Signal  |
| 5 | SDA    | I2C Data Line     |
| 6 | SCL    | I2C Clock Line    |

|  |   |   |
|--|---|---|
| <br><b>EastRising</b><br>buydisplay.com | EastRising Technology Co.,Ltd<br>旭日东方科技有限公司 |  <b>CD</b> |
|  |   | UNIT: MM      SIZE: A4<br>SHEET: 1 OF 1   |
| LCM PART NUMBER: ER-TPC070-8-USB   |   | REV: A0   |
| DRAWN BY :JIM  | CHECKED BY :JAVEN                           | APPROVED BY : TONY  |