
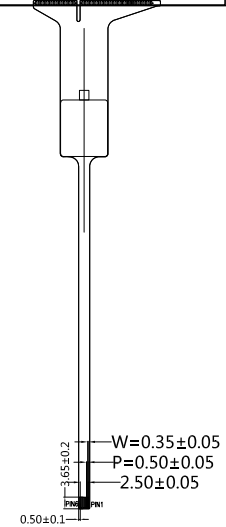
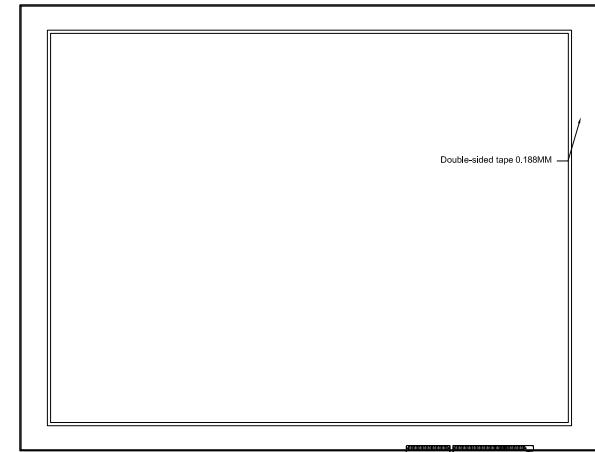
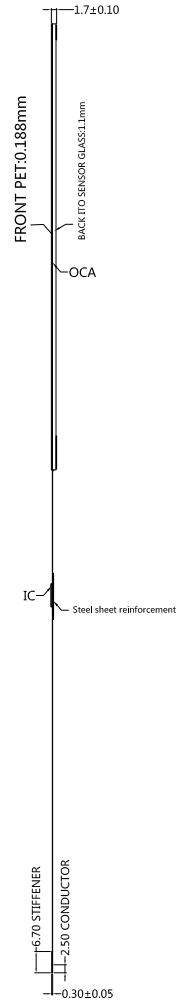
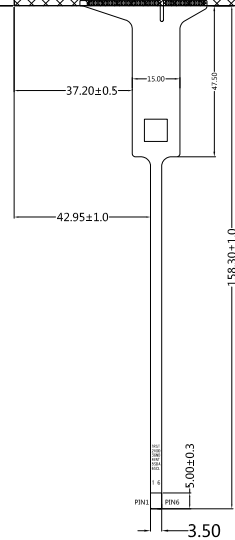


Customer:	Customer NO.:	Customer Approve By:	REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
			A0	1'ST,DESIGN	JIM	Dec-20-2022

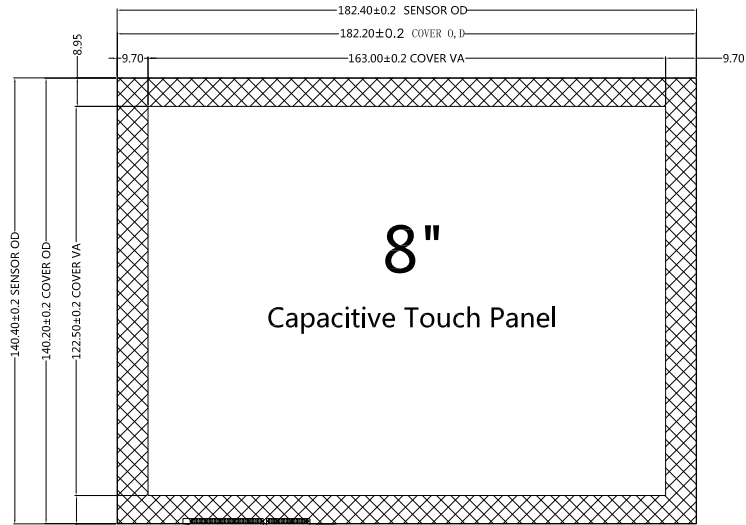

NOTE:


- G+P
ITO GALSS:1.1MM
PET:0.188mm
- IC: GT911
- OPERATING VOLTAGE: 2.8-3.3V
- TRANSMITTANCE: >= 85%
- SURFACE HARDNESS: >3H
- OPERATING TEMP: -20 ~ +70°C
- STORAGE TEMP: -30 ~ +80°C
- UNFILLED DIMENSINOAL TOLERANCE ±0.2mm

I2C Interface	
RST	1
VDD	2
GND	3
INT	4
SDA	5
SCL	6



旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com Email: sales@buydisplay.com

APPROVALS	DATE	MODEL NUMBER :		GENERAL TOL	UNITS
APP		ER-TPC080-2		SCALE:	MM
CHK				N.T.S.	
DWN	JIM	Dec-20-22	DO NOT SCALE THIS DRAWING.	SHEET:	1