



Customer:	Customer NO:	Customer Approve By:	REV A0	DESCRIPTION OF MODIFY 1'ST,DESIGN	MODIFY BY JIM	DATE Oct-10-2018
-----------	--------------	----------------------	-----------	--------------------------------------	------------------	---------------------

Capacitive Touch USB Driving Board

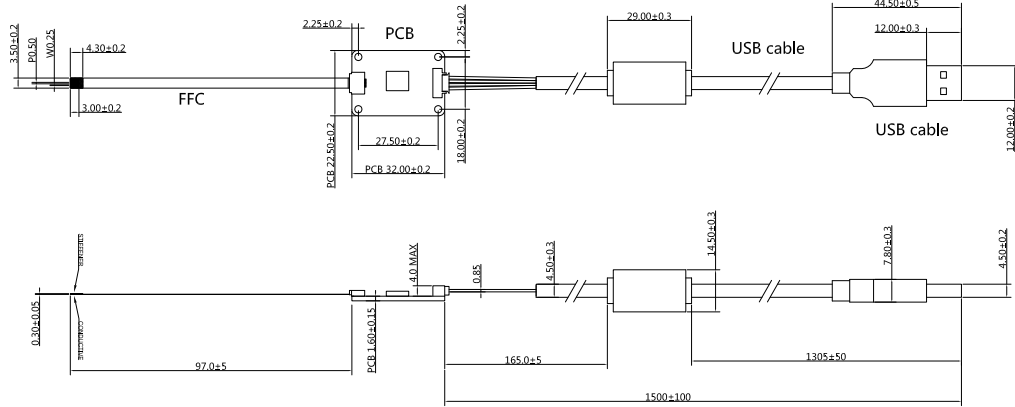

Capacitive Touch Screen

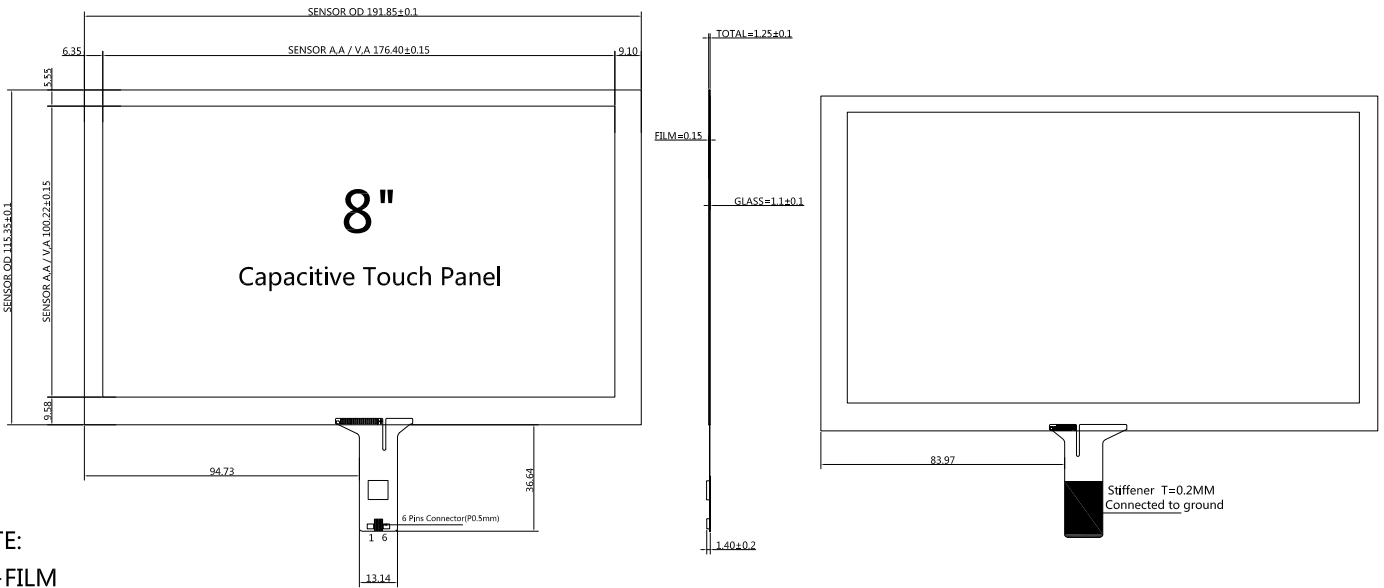

NOTE:

- 1.G+FILM
ITO GALSS:1.1MM
Explosion-Proof Membrane:0.15MM
2. USB DRIVE BOARD
- 3.OPERATING VOLTAGE: 2.8-3.3V
- 4.TRANSMITTANCE: >= 80%
- 5.SURFACE HARDNESS: 3H
- 6.OPERATING TEMP: -20 ~ +70°C ≤90%RH
- 7.STORAGE TEMP: -30 ~ +80°C ≤90%RH
- 8.OD=Outline Dimension
- 9.AA=Active Area VA=Visual Area

1	/RESET	Chip Reset
2	VDD	Supply Voltage
3	GND	Ground Connection
4	/INT	Interrupt Signal
5	SDA	I2C Data Line
6	SCL	I2C Clock Line


 深圳旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD
 Web: www.buydisplay.com Email: sales@buydisplay.com

APPROVALS	DATE	MODEL NUMBER :	 GENERAL TOL MM	
APP CHK DWN	JACK JIM	Oct-10-2018 Oct-10-2018		ER-TPC080-3-USB
SCALE 1:1			PROJECTION	VERSION A0
				SHEET: 1