

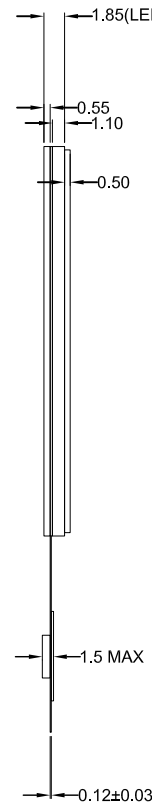


REV.	DESCRIPTION OF MODIFY	MODIFY BY	DATE
A0	1'ST,DESIGN	JIM	Dec-28-2021
A1			
A2			

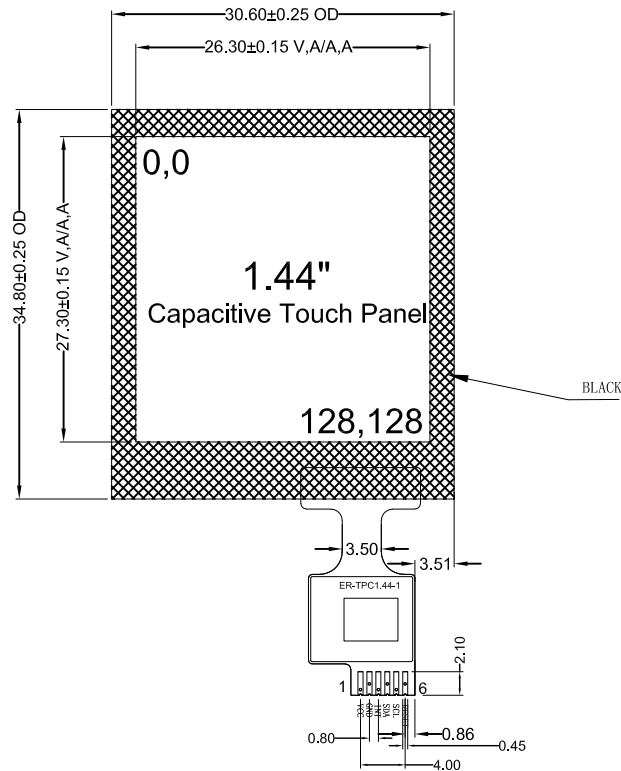

海绵胶
Double Adhesive Tape
T=0.5mm

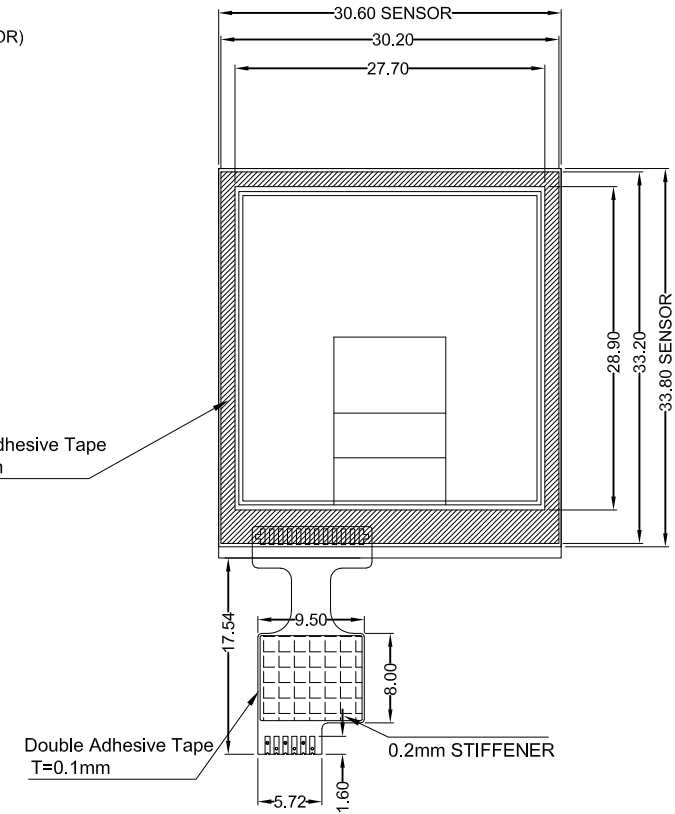

NOTE:

- 1.TYPE:G+G IC FT6336U
- 2.OPERATING VOLTAGE: 2.8-3.3V
- 3.TRANSMITTANCE: >= 87%
- 4.SURFACE HARDNESS:=6H
- 5.OPERATING TEMP: -20 ~ +70°C
- 6.STORAGE TEMP: -30 ~ +80°C
- 7.TOLERANCE:±0.20

Pin Assignment

PIN NO.	SIGNAL	DESCRIPTION
1	VDD	Supply Voltage
2	GND	Ground Connection
3	/INT	Interrupt Signal
4	SDA	I2C Data Line
5	SCL	I2C Clock Line
6	/RESET	Chip Reset



旭日东方科技有限公司
EASTRISING TECHNOLOGY CO.,LTD

Web: www.buydisplay.com

Email: sales@buydisplay.com

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL.	UNITS
APP			ER-TPC1.44-1			SCALE:
CHK					N.T.S.	
DWN	JIM	Dec-28-21	DO NOT SCALE THIS DRAWING.		SHEET:	1